

FLUSH VALVE BOXES

SQUARE FLUSH VALVE BOX

FUNCTION: Used to cover flush valves which are concealed in the wall construction, and provide a means of actuating the valves by handle, push button or pedal, and at the same time to provide access from the toilet room to adjust or maintain the valve.

The face-of-wall box is for tile, masonry, or dry wall construction. The open back box is installed in the wall by means of anchor or nail holes provided.

The flush-with-wall box is for plaster or wet wall construction and is installed prior to wall finish. The adjustable anchoring lugs provide a means of securely anchoring the box, so that the face of the cover will be flush with the finished wall.

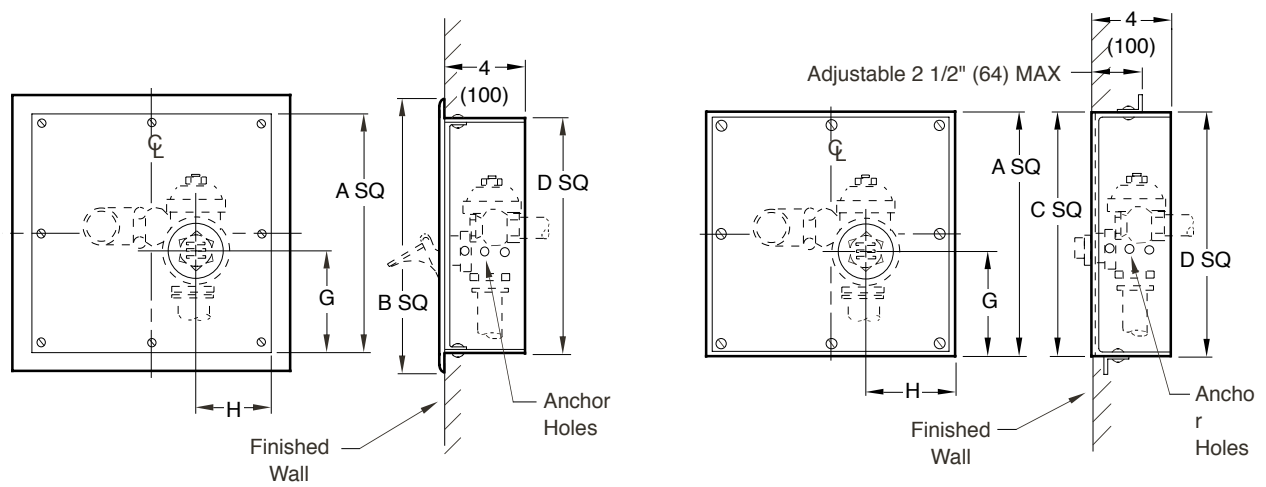


Fig. 4740 FACE-OF-WALL BOX

Fig. 4745 FLUSH-WITH-WALL BOX

A Opening	B SQ	C SQ	D SQ
10 (255) x 10 (255)	11 3/4 (300)	10 1/2 (265)	10 (255)
12 (305) x 12 (305)	13 3/4 (350)	12 1/2 (320)	12 (305)
15 (380) x 15 (380)	16 3/4 (425)	15 1/2 (395)	15 (380)

NOTE: G and H dimensions depend on Flush Valve being used. Always specify Manufacturers name and valve model number.

NOTE: Dimensions shown in parentheses are in millimeters.

REGULARLY FURNISHED:

Chrome Plated Bronze Square Frame and Cover Secured with Screws, Aluminum Frame and Anchors.

VARIATIONS:

- 1 1/2" (38) DIA Handle Hole Located to Accommodate Flush Valve Being Used (Specify Mfrs. Name and Model Number)
- Handle Hole any Size or Location (Specify)
- Vandal Proof Screws -U

OPTIONAL MATERIALS:

- Nickel Bronze Frame and Stainless Steel Cover -NB
- Polished Bronze Frame and Cover -PB

4740, 4745

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

E D C B	7-5-95 7-27-94 8-11-93 3-3-83	Added Millimeters Revised Update Submittal Rev and Redrawn	EMB EMB TWK CR	BS BS BS BS/JM	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 4740, 4745
REV.	DATE	DESCRIPTION	BY	CKD. BY			