
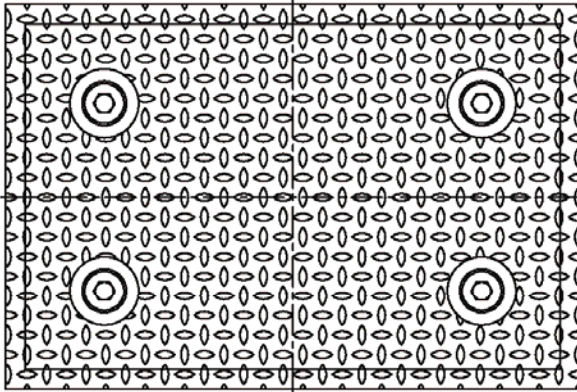


**5600 Lint Interceptor**


Project	
Engineer	
Mechanical	

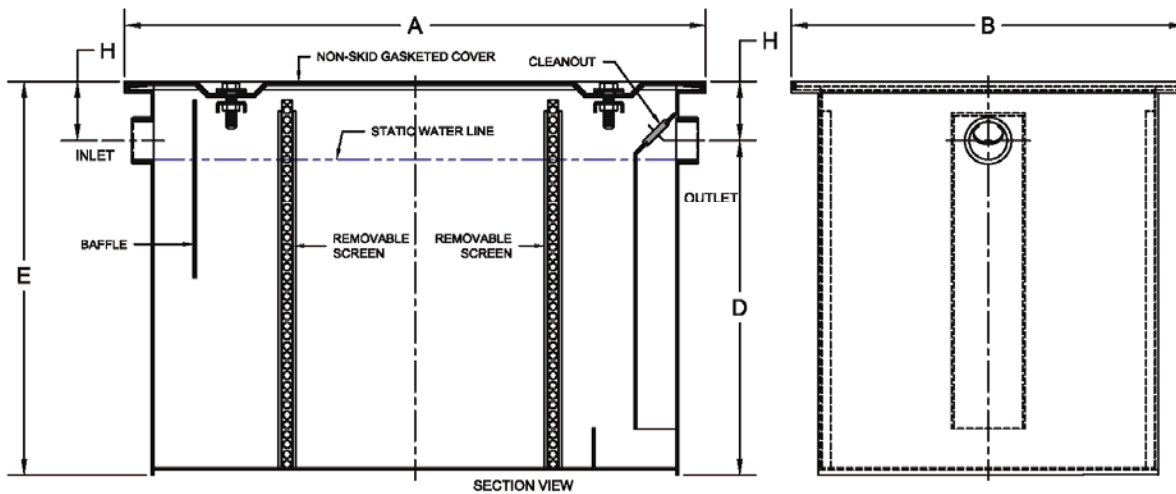

•	Catalog Number	Size No. of Machines	Pipe Size	Flow Rate (GPM)	Liquid Capacity (Gal)	Dimensions (Inches)					No. of Lids	No. of Bolts
						A	B	D	H	E		
	5600-3	3	2"	30	40.7	29 1/2	20	17	4	24	1	4
	5600-4	4	3"	40	48.3	29 1/2	20 1/2	20	4	24	1	4
	5600-8	8	4"	80	72.7	33 1/2	26	26	4	30	2	8
	5600-10	10	4"	100	109.7	37 1/2	30	28	4	32	2	8
	5600-15	15	6"	150	201.7	55 1/2	26	30	6	36	2	8
	5600-20	20	6"	200	220.0	67 1/2	28	32	8	40	3	12
	5600-30	30	6"	300	335.1	67 1/2	28	44	10	54	3	12
	5600-40	40	6"	400	417.0	67 1/2	30	54	12	66	3	12
	5600-50	50	6"	500	411.7	67 1/2	40	50	10	60	3	12
	5600-75	75	6"	750	807.5	91 1/2	40	54	8	62	4	16
	5600-100	100	6"	1000	864.9	98	50	54	12	66	4	16
	5600-150	150	8"	1500	215.5	98	50	80	12	92	4	16

**Regularly Furnished:** Fabricated A.R.C. steel lint interceptor with removable primary and secondary filters, gasketed cover, stainless steel internal flow control orifice plate, removable cross bars and securing bolts. Primary and Secondary Filters - 3/8" perforations.

Suffix Options		
Suffix	Description	•
-18	Heavy Duty Cover *	
-24	Anchor Flange*	
-26	Anchor Flange w/ Clamp Device *	
-AE	Adjustable Extension (4"-6")	
-T	Cover Recessed for Tile (Specify Thickness) *	
-XT	Fixed Extension (Specify Height) *	

Outlet Variations		
Suffix	Description	•
-NH	No-Hub	
-IPS	Female Threaded	

*\*Dimensions vary from illustration*