

WEATHER-TITE APPLICATION TOOLS


ONE STEP BATTERY POWERED SINGLE BEAD APPLICATOR

Weather-Tite®
One Step
Foamable Adhesive

- ▼ Easy Application
- ▼ No Temperature Limitations
- ▼ Quick Set Time



PATENTS PENDING
For additional information
call 888-564-9733 or see us at:
www.millenniumadhesives.com

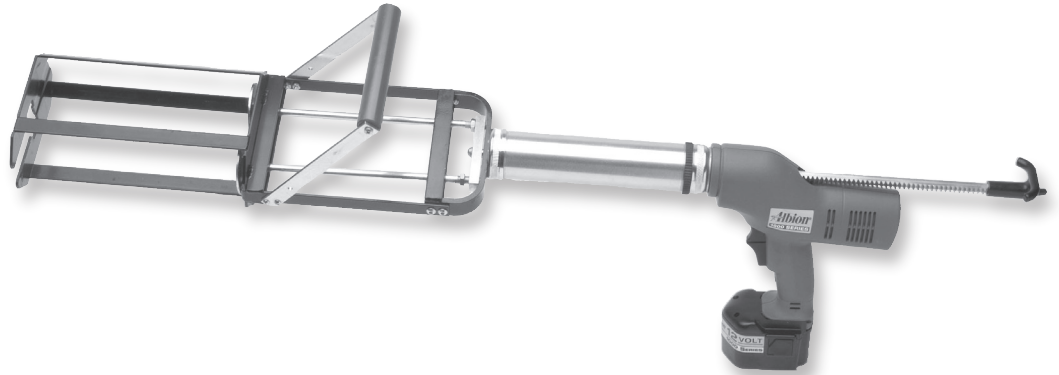

Benefits

- Fastest application to install single beads of Insulation and Membrane Adhesives
- Saves time, saves labor
- Battery powered, no hoses or pumps
- Economical, costs thousands less than pump or spray rigs
- Field approved, designed by roofers for roofers
- Ideal for jobs of any size no matter if the roof is wide open or heavily congested

User Directions

- Assemble the applicator by following the provided assembly instructions.
- Charge the battery pack before using this tool for the first time and whenever more force is needed to dispense adhesive at the required rate. NOTE: 2 rechargeable batteries and 1 battery charger are provided.
- Install fully charged battery in battery pack from the front by pressing the release buttons and sliding battery pack into body of tool until clamp engages.
- Test the applicator by depressing the bottom trigger mechanism. Make sure all plungers are functional. To activate the return mechanism, depress the top trigger mechanism and pull up on the plunger arm.
- Prepare One Step Adhesive Cartridge by removing the plugs from the end of the cartridge and attaching the provided static mixing nozzle.
- Place prepared cartridge in applicator. Ensure cartridge is set firmly in place with label placed in the up position.
- Begin dispensing adhesive by depressing trigger mechanism.
- This applicator's auto-reverse feature reverses the plunger when the trigger mechanism is pressed for more than 2 seconds and then released; the plunger will automatically back off, halting the flow of material.
- This tool's 'lock' switch is located below the trigger. To lock the tool push the lock switch to the up position, to unlock the tool move the switch to the down position.
- If dispensing is interrupted for more than a few minutes, the static mixing nozzles may need to be replaced.
- At end of each day, recharge batteries for use the following day.

Maintenance Instructions:

- Keep all moving parts free of adhesive or debris.
- Do not allow adhesive to build up on the plungers or plunger rods.
- Clean dust and debris from charger and tool vents.
- The battery should be fully charged prior to use.
- For faster charge times, do not allow battery to fully discharge. A partially discharged battery will charge exponentially quicker than a fully discharged battery.

Do the Job Right...with Weather-Tite