


2120 Floor Drain with Square Fixed Top – Perforated Grate

Regularly Furnished: Painted cast iron floor drain with anchor flange, seepage openings, clamping collar, ductile iron perforated grate, deep sump body, (4) 3" NPT auxiliary inlets (3) plugged and bottom outlet.
 ASME Load Rating = X.H. (Extra Heavy Duty) 7,500-10,000 Lbs.

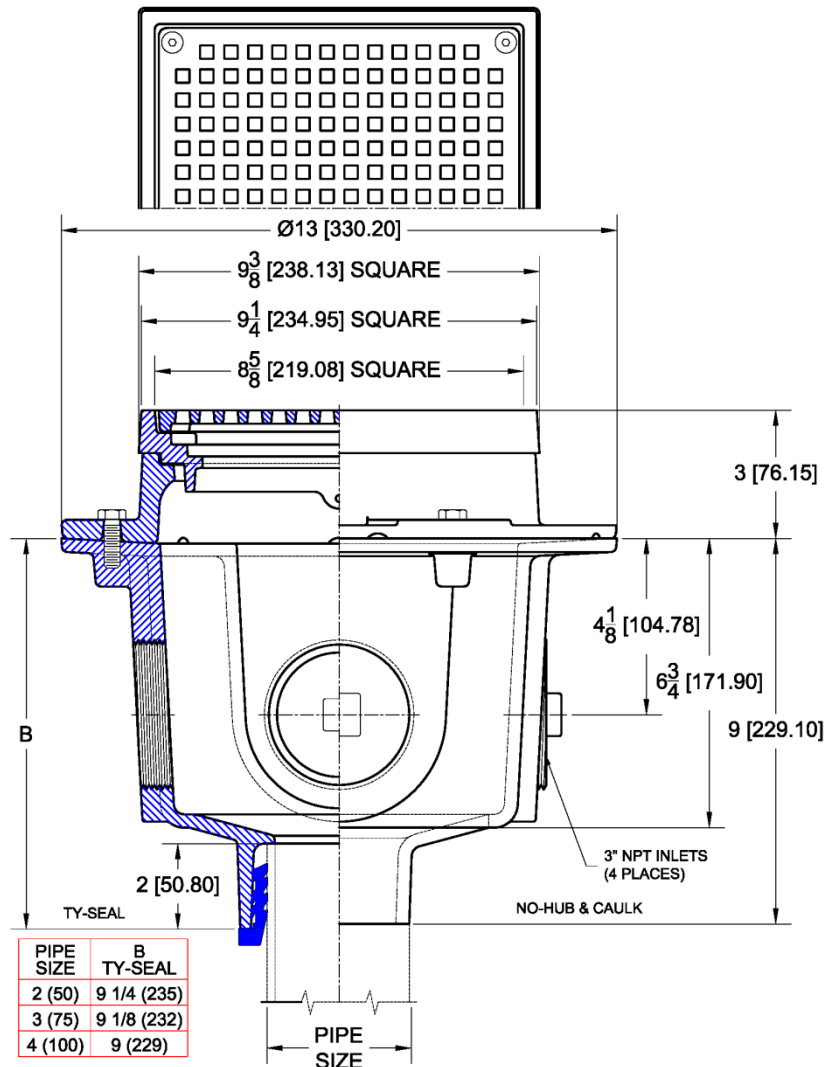

Top Material		
✓	Suffix	Description
	-1	Satin Finish Nickel Bronze Veneer
	-2	Satin Finish Bronze Veneer
	-12	Ductile Iron
	-102	Polished Chrome Plated Brass Veneer
	-304	Satin Finish 304 Stainless Steel Veneer

Outlet Variations		
✓	Type	Designation
	No-Hub	2NH, 3NH, 4NH
	Push-On	2TY, 3TY, 4TY
	Inside Caulk	2IC, 3IC, 4IC

Options		
✓	Suffix	Description
	-ARC	Acid Resistant Coating (C.I. Parts)
	-TSD	Trap Seal Device (Model 4405)
	-VP	Vandal Proof Secured Grate
	-8	Secondary Strainer
	-14	Hinged Grate
	-19	Hinged Locking Grate
	-23	Grate Riser (1-1/2" High)
	-27	Sediment Bucket
	-31	Backwater Valve (2,3,4" Only)
	-33	Closure Plug
	-39	Galvanized Iron Parts
	-123	Stainless Steel Mesh Lined Bucket