
Specification: MIFAB® / Hydromax Series MH-301, 401, 501, 601 (specify outlet connection size) lacquered cast iron siphonic roof drain with wide anchor flange, cast iron waterproofing membrane clamp ring with integral 2" water dam and ductile iron air baffle / inducer with Type 304 stainless steel allen key hardware.

Function: Used in any type of roofs as a siphonic roof drain overflow system. The siphonic overflow roof drain is designed to accept water once the main siphonic roof drain is clogged or overwhelmed.

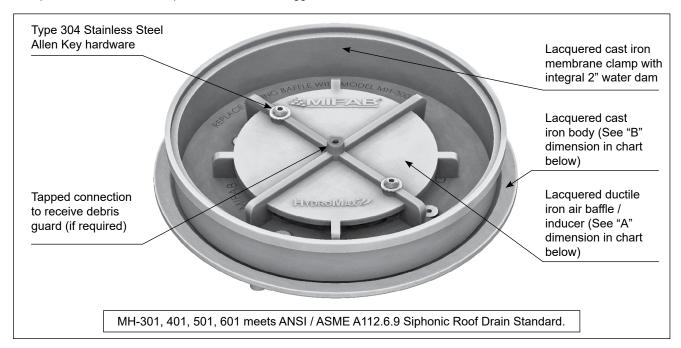

MODEL NUMBER	PIPE SIZE	BODY HEIGHT NO HUB (STANDARD)	PERFORMANCE AND DIMENSION INFORMATION				
			Resistance Value (K)	Minimum Flow Rate (GPM)	Maximum Flow Rate (GPM)	"A" Air Baffle / Inducer Diameter	"B" Body Diameter
MH-301	3" (76)	3 1/8" (79)	0.12	23.00	415.00	8.86" (225.11)	13" (330)
MH-401	4" (102)	3 1/2" (90)	0.08	75.00	750.00	12.19" (309.73)	19 3/8" (492)
MH-501	5" (125)	4 3/8" (110)	0.04	120.00	1,300.00	14.62" (371.45)	19 3/8" (492)
MH-601	6" (152)	4 3/4" (120)	0.04	160.00	1,800.00	17.87" (454)	25 1/4" (640)

SUFFIX **OPTIONAL VARIATIONS: SUFFIX OPTIONAL VARIATIONS:** Acid resistant epoxy coated body Stainless steel ballast guard -11 -G -12A Galvanized body and membrane clamp **Debris Guard** -M -13 Galvanized body, membrane clamp and dome -PA Pennsylvania Steel Act compliant product -B Sump receiver -U Underdeck clamp Buy American Act Compliant product -BA

	CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.
--	---

Job Name:	Page No:
Section No:	Contract:
Schedule No:	Purchase Order No:

MIFAB® reserves the right to make changes in material and design without formal notice or obligation.

USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880