


3063 9-3/4" Diameter Roof Receptor Drain

Project	
Engineer	
Mechanical	

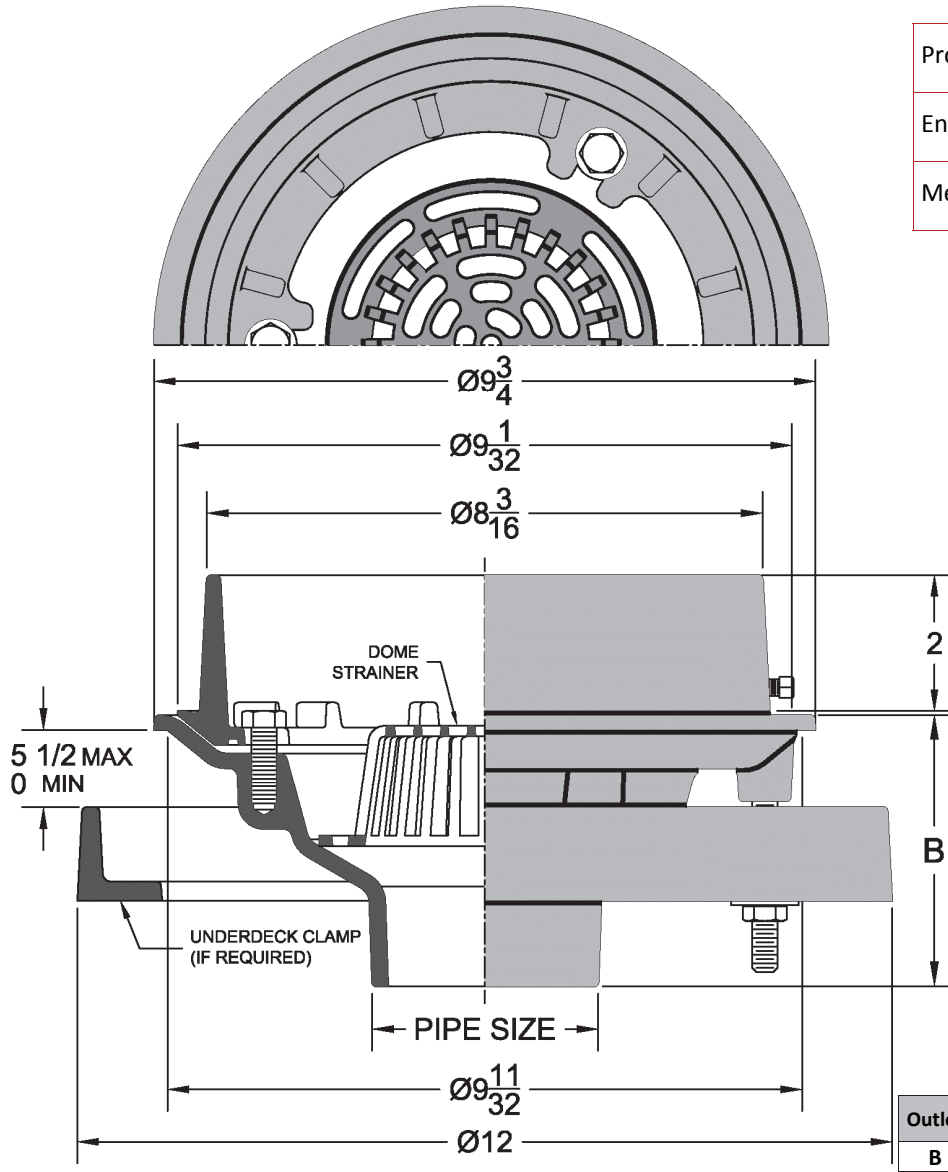

Outlet	No-Hub	Push-On	Inside Caulk	Threaded
B	4	4-1/4	4-3/4	3-1/4

3063	-46 Cast Iron Body with Aluminum Dome	Dome Free Area (Sq. In.)
•		15.0

Suffix Options		
Suffix	Description	•
-ARC	Acid Resistant Coating	
-SO	90 Degree Side Outlet (2IPS,3IPS,4IPS)*	
-39	Galvanized Cast Iron	
-52	Sump Receiver*	
-53	Under-Deck Clamp*	
-189	Bearing Pan w/ Clips & Securing Hardware*	

Regularly Furnished: Cast iron indirect waste drain with flange & internal dome strainer.

Outlet Variations		
Type	Designation	•
No-Hub	2NH,3NH,4NH	
	6NH	
Push-On Gasket	2TY,3TY,4TY	
Inside Caulk	2IC,3IC,4IC	
Threaded	2IPS,3IPS,4IPS	

Optional Extensions			
Suffix	Description		•
-DF	Fixed Extension (2" High)* For Each Additional 1" (Add / In.)	Painted	
		-39 Galv	
-EB	Adjustable Drain Extension Pan*	Painted	
		-39 Galv	

*Dimensions vary from illustration