



# Standard Retrofit Master Flash®


For the Metal Roofing Industry

| Advanced Ozone Resistance tested to...  |              | EPDM<br>70 hour @ 500 pphm | HIGH TEMP RED/GRAY SILICONE<br>70 hour @ 500 pphm |
|---|--------------|----------------------------|---|
| High Temperature Resistance Tested to   | Intermittent | +135°C (+275°F)            | +260°C (+500°F)                                   |
|   | Continuous   | +100°C (+212°F)            | +225°C (+437°F)                                   |
| Low Temperature Resistance tested to... |              | -55°C (-67°F)              | -74°C (-101°F)                                    |
| Compression Set Maximum...              |              | 25%                        | 50%   |

\*Complete specification data and testing methods are available upon request.

Available in three sizes

Designed to seal existing pipes/vents that requires a wrap-around existing or hard to reach installation

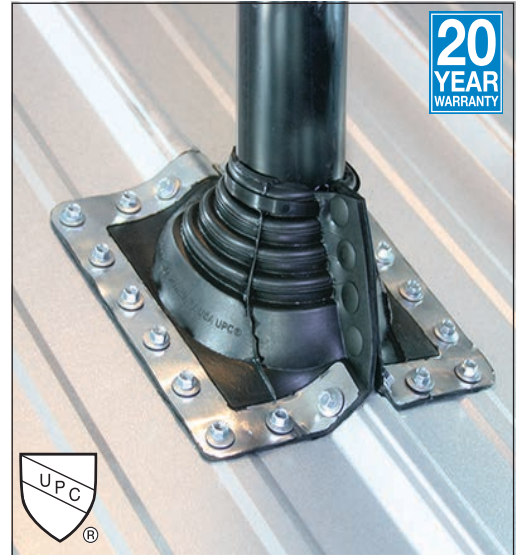

## Weather Protection

Made of EPDM or High Temp Red Silicone,


These flashings are compounded specifically for maximum resistance to weathering due to ozone and ultraviolet light.

Pipe diameters can be seen clearly for proper fitting.

Easily Installed aluminum fastener snaps included with the Silicone flashing


Unique compression seal technology

Easily Installed aluminum fastener snaps included with the Silicone flashing

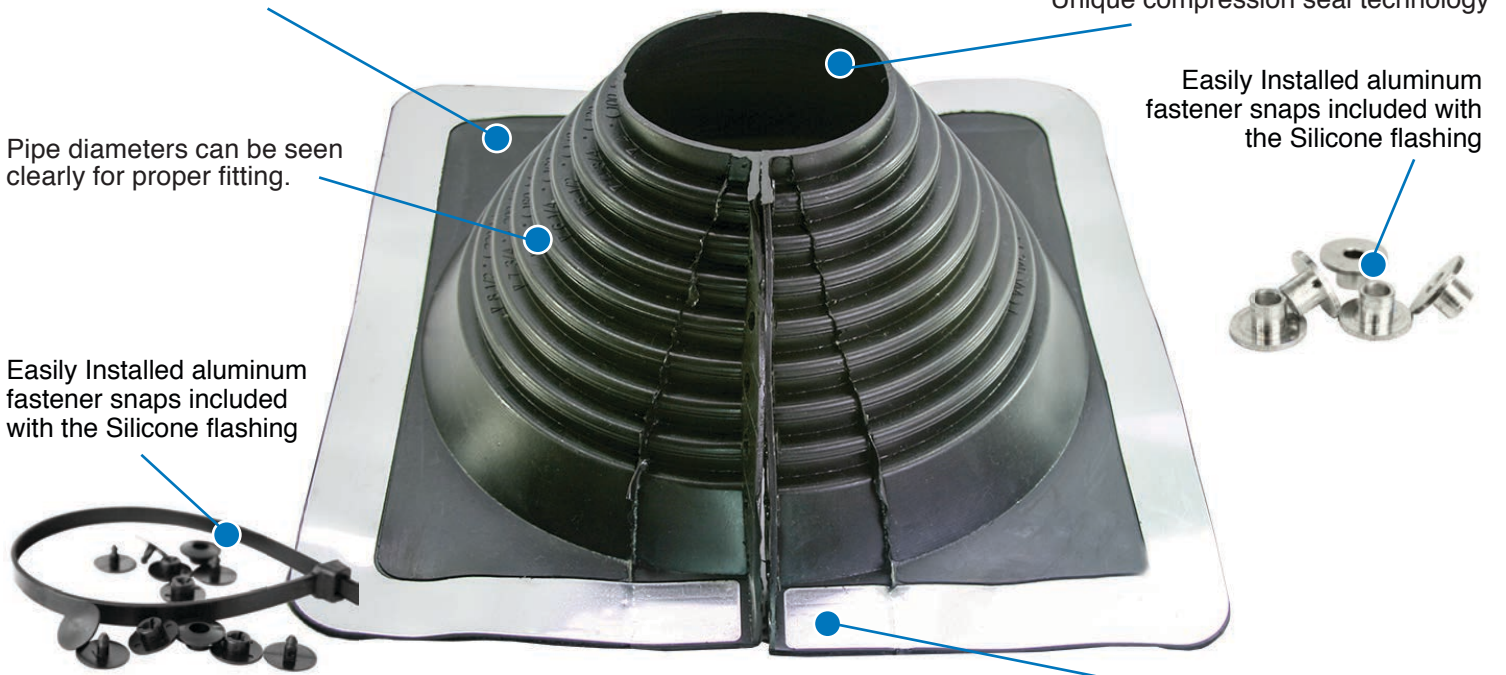


## Adaptable Base

The base is designed to mold to most panel configurations and roof pitches regardless of pipe location.




### #1 Standard Retrofit Flashing Details

|                         |                        |
|-------------------------|------------------------|
| A-Top Opening           | 1/2" (12mm)            |
| B-Cut to suit pipe size | 1/2" - 4" (12 - 101mm) |
| C-Base                  | 8-3/16" (205mm)        |



### #2 Standard Retrofit Flashing Details

|                         |                           |
|-------------------------|---------------------------|
| A-Top Opening           | 4" (101mm)                |
| B-Cut to suit pipe size | 4" - 9-1/4" (101 - 235mm) |
| C-Base                  | 14-1/4" (362mm)           |



### #3 Standard Retrofit Flashing Details

|                         |                                |
|-------------------------|--------------------------------|
| A-Top Opening           | 9-1/4" (235mm)                 |
| B-Cut to suit pipe size | 9-1/4" - 16-1/4" (235 - 412mm) |
| C-Base                  | 21-1/2" (546mm)                |