

Location: _____




F1830-PL

LARGE PLANTING AREA DRAIN WITH 8" HIGH PERFORATED STANDPIPE AND DOME

Specification: MIFAB® Series F1830-PL lacquered cast iron standpipe type planting area drain with anchor flange, cast iron membrane clamp ring with primary and secondary weepholes for waterproofing membrane, and adjustable 4" (102) diameter ABS perforated standpipe and stainless steel secured dome.

Function: Used in areas such as flower boxes and others where the drain is buried underground. Perforated standpipe allows for sub surface drainage of water. The stainless steel dome secured to the top of the standpipe is set at ground level and permits the drainage of excess surface water. Membrane clamp is provided to secure the waterproofing membrane.

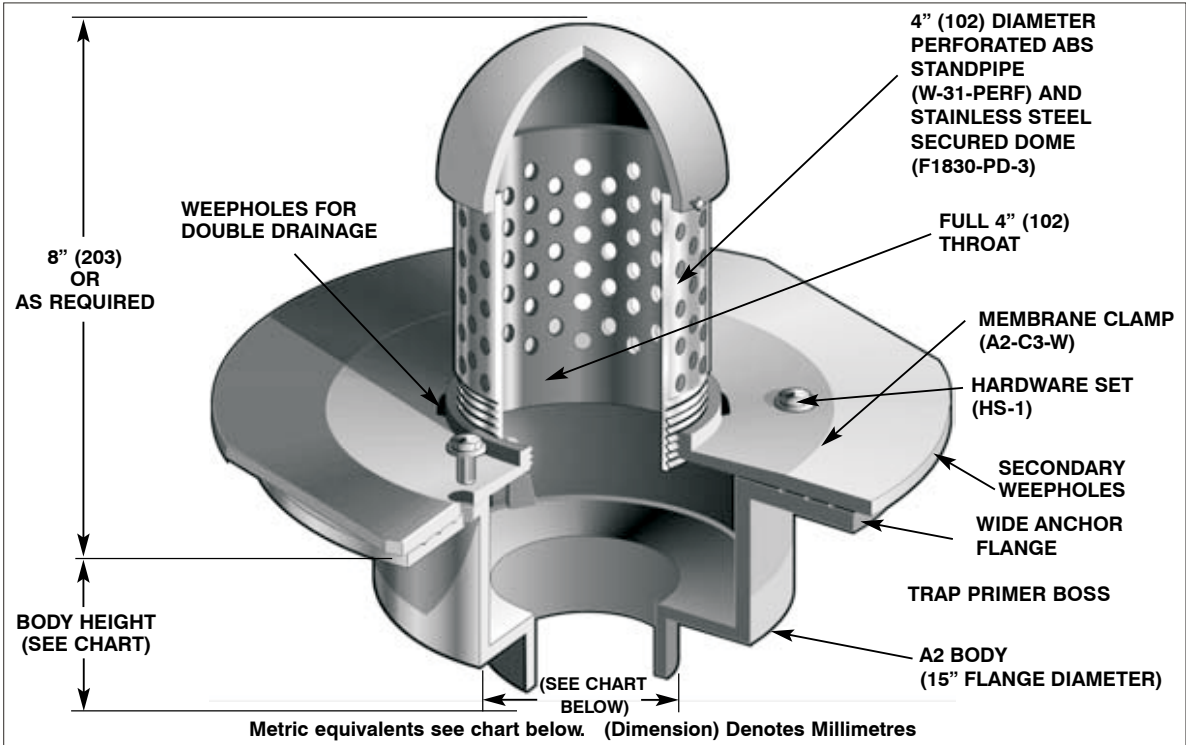

PARTS:

-  A2 Body
-  W-31-PERF and F1830-PD-3
-  A2-C3-W
-  HS-1

F1830-PL Series meets ANSI/ASME floor drain standard A112.6.3-2001

PIPE SIZE	BODY HEIGHT				
	NO HUB (STANDARD)	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)	PVC/ABS (-30)/(-31)
2" (51)	6" (152)	6 1/8" (156)	5 7/16" (138)	6 1/4" (159)	7 1/8" (181)
3" (76)	6" (152)	6 1/8" (156)	5 7/16" (138)	6 1/4" (159)	7 3/8" (187)
4" (102)	6" (152)	6 1/8" (156)	5 7/16" (138)	6 1/4" (159)	7 3/8" (187)
5" (127)	6" (152)	—	5 7/16" (138)	6 1/4" (159)	—
6" (152)	7 1/4" (184)	7" (178)	7" (178)	6 1/4" (159)	—

- SUFFIX OPTIONAL VARIATIONS**
- 11 Acid resistant epoxy coated body
 - 13 Galvanized body
 - 28 Stainless steel body and grate (Type 304)
 - 30 PVC socket connection body
 - 31 ABS socket connection body
 - 40 Underdeck clamp
 - 41 Sump receiver
 - 43 Solid standpipe
 - 79 Standpipe over 8", per inch
 - 83 Stainless steel mesh screen around pipe
 - 90 Threaded side outlet (2", 3", 4")

- SUFFIX OPTIONAL VARIATIONS**
- 90NH No hub side outlet (2", 3", 4")
 - 92 Stainless steel perforated stand pipe
 - BA Buy American Act compliant product
 - (Standard) No hub outlet
 - MG MI-GARD Floor Drain Trap Sealer (2", 3" or 4")
 - P Push on outlet
 - PA Pennsylvania Steel Act compliant product
 - T Threaded outlet (2", 3", 4")
 - X Inside caulk outlet

Job Name: _____ Page No: _____

Section No: _____ Contractor: _____

Schedule No: _____ Purchase Order No: _____