


# FLOOR DRAINS

WITH 8 1/2" (215) ROUND ADJUSTABLE TOPS

## WIDE FLANGE DECK DRAIN WITH ADJUSTABLE LIP DIMENSION

Load Rating: Medium Duty having a Safe Live (Static) Load between 2,000 lbs. (900 kg) and 4,999 lbs. (2,250 kg) per ASME A112.6.3 Floor Drain Standard. For the specific Safe Live Load rating of any grate, contact the Smith representative or factory direct.

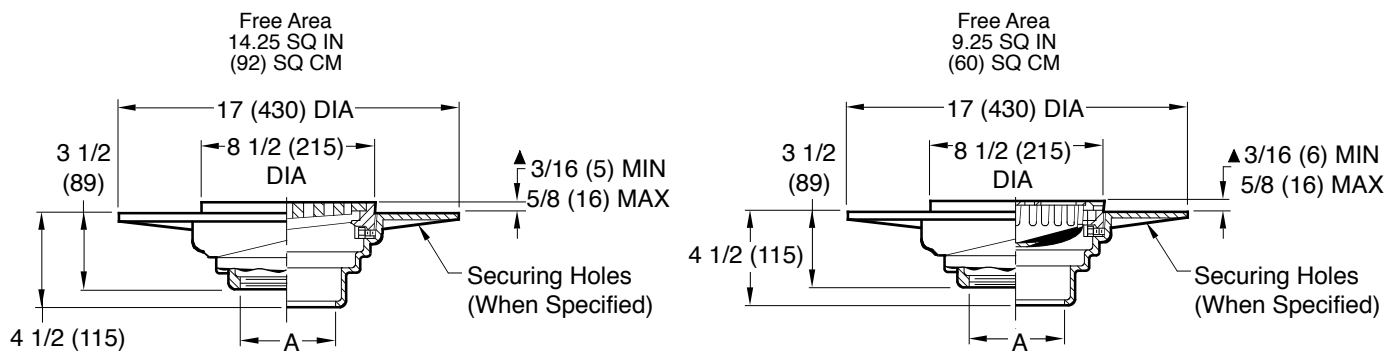

A (Pipe Size) = 02(50), 03(80) or 04(100)

Fig. DX2312C . . . LESS BUCKET  
 Fig. DX2312T . . . LESS BUCKET

Fig. DX2312CB . . . WITH "SAFE-SET" BUCKET  
 Fig. DX2312TB . . . WITH "SAFE-SET" BUCKET

**NOTE:** If waterproof deck covering thickness is greater (or less) than the dimension shown, lip dimension must be specified. Roughing dimensions of the body must be adjusted accordingly. Drain body should be set low enough to permit "dimpling" of area surrounding drain.

▲ add 3/16" (5) when bronze top is specified.

**REGULARLY FURNISHED:**  
 Duco Cast Iron Body with  
 Cast Iron Adjustable Top.

- VARIATIONS:**
- NO-HUB Adaptor (Specify Fig. 2646Y)
  - Securing Holes -SH
  - Vandal Proof Grate -U
  - T Threaded Outlet
  - Quad Close Trap Seal (Specify Fig. 2692)

- OPTIONAL MATERIALS:**
- Galvanized Cast Iron -G
  - Nickel Bronze Top -NB
  - Polished Bronze Top -PB

**NOTE:** Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER: SDX2312  
 SIZE: A  
 SCALE: NONE  
 DATE: 5-17-85  
 APPROVED BY: TD  
 CHECKED BY: TD  
 DRAWN BY: PJ  
**DX2312, DX2312B**  
 FIGURE NUMBER

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA  
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

E	7-24-19	Added Load Rating	MW	JM	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
D	6-19-19	Removed Function	MW	JM			
C	7-17-15	Revised Variations	TBW	CL			
B	4-9-97	Added Millimeters	EMB	BS			<b>DX2312, DX2312B</b>
REV.	DATE	DESCRIPTION	BY	CKD. BY			