


1100-A Floor Drain Body with Adjustable Top Assembly

Project	
Engineer	
Mechanical	

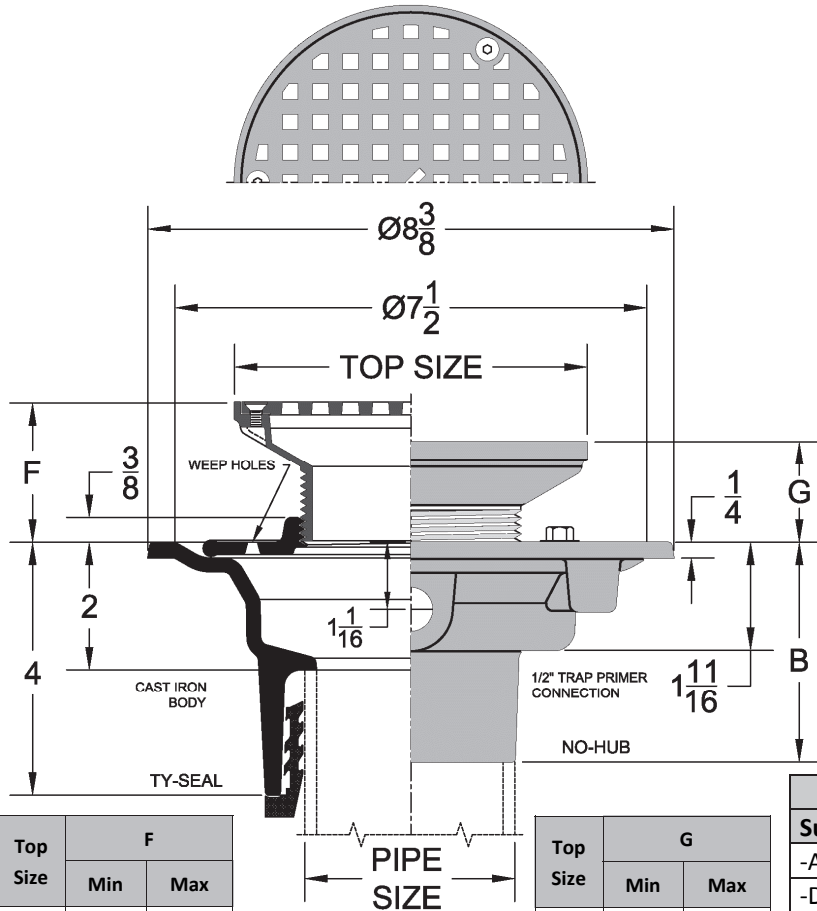

*Dimensions vary from illustration

Outlet	No-Hub	Inside Caulk	Threaded
B	3 1/2	4 1/4	2 3/4

Top Size	F	
	Min	Max
5	1 7/16	2 1/8
6	1 1/2	2 3/8
7	1 3/8	2 1/4
8	1 3/8	2 1/4
10	1 7/8	3 1/4

Top Size	G	
	Min	Max
5	15/16	1 5/8
6	1	1 3/4
7	1	1 3/4
8	1	1 5/8
10	1 5/8	2 5/8

Top Size & Type	●			Grate Free Area (Sq. In.)
	-1 Cast Iron Body with Satin Finish Nickel Bronze Top	-2 Cast Iron Body with Satin Finish Bronze Top	-85 Cast Iron Body with Satin Finish Stainless Steel Top	
A5				5.8
A6				7.7
A7				10.6
A8				14.0
A10				32.2

Regularly Furnished: Cast iron floor drain body with flange, integral clamping collar, seepage openings, 1/2" primer tap with plug, adjustable type "A" top assembly.

Outlet Variations		●
Type	Designation	
Inside Caulk	2IC,3IC,4IC	
No-Hub	2NH,3NH,4NH,6NH*	
Push On Gasket	2TY,3TY,4TY	
Threaded	2IPS,3IPS,4IPS	

Suffix Options		
Suffix	Description	●
-ARC	Acid Resistant Coating	
-DC	Debris Cover	
-DIA	Deck Installation Assembly*	
-EF4	4" Round Funnel Assembly *	-1
		-2
		-85
-EF6	6" Round Funnel Assembly *	-1
		-2
		-85
-EG6	6" Elongated Funnel Assembly*	-1
		-2
		-85
-EG8	8" Elongated Funnel Assembly*	-1
		-2
		-85
-SO	90 Degree Side Outlet (2IPS,3IPS,4IPS)	
-TSD	Trap Seal Device (See Model 4405)	
-VP	Vandal Proof Top Assembly	
-X	Heavy Duty Top Assembly (A6 Only)	
-23	Grate Riser (Extends Grate 3/8")	
-27	Sediment Bucket	
-31	Backwater Valve	
-33	Closure Plug	
-39	Galvanized Cast Iron	
-83	Special Engraving	
-94	Cast Iron Extension Adapter*	Painted
		-39
-102	Chrome Plated Top Assembly	