

Kubos™ EasyInstall Universal Tub/Shower Combination

FEATURES:

- CPT-1300-UNI: Universal Shower Valve Trim
- S-5001-E175: Kubos Exhilaration 5 Function Shower Head
- S-2560: Shower Arm and Flange
- S-1569: Diverter Tub Spout

VALVE OPTIONS:

- Retrofittable to:
 - Kohler® Rite-Temp® K-304-KS valve
 - Moen® PosiTemp® 62370 valve
 - Delta® R10000-UNWS valve
 - Symmons® 46-2-X-BODY Temptrol® valve

STOCK FINISHES:



PC BN

STANDARDS:

- ADA compliant


WARRANTY:

Visit www.speakman.com for full product warranty information


- See Speakman.com For Warranty Information




Retrofits to:




MOEN® Posi-Temp®
2510
2520
2570
2580
2590



KOHLER® Rite-Temp®
K-304-CS-NA
K-304-CX-NA
K-304-PS-NA
K-304-PX-NA
K-304-US-NA
K-304-UX-NA
K-304-K-NA
K-304-KS-NA




DELTA® MultiChoice®
R10000-UNBX
R10000-UNBXH F
R10000-UNWS
R10000-UN
R10000-UNWSHF



SYMMONS® Temptrol®
4000-BODY
4000-X-BODY
46-2-X-BODY

Information continues on next page

Kubos™ EasyInstall Universal Tub/Shower Combination

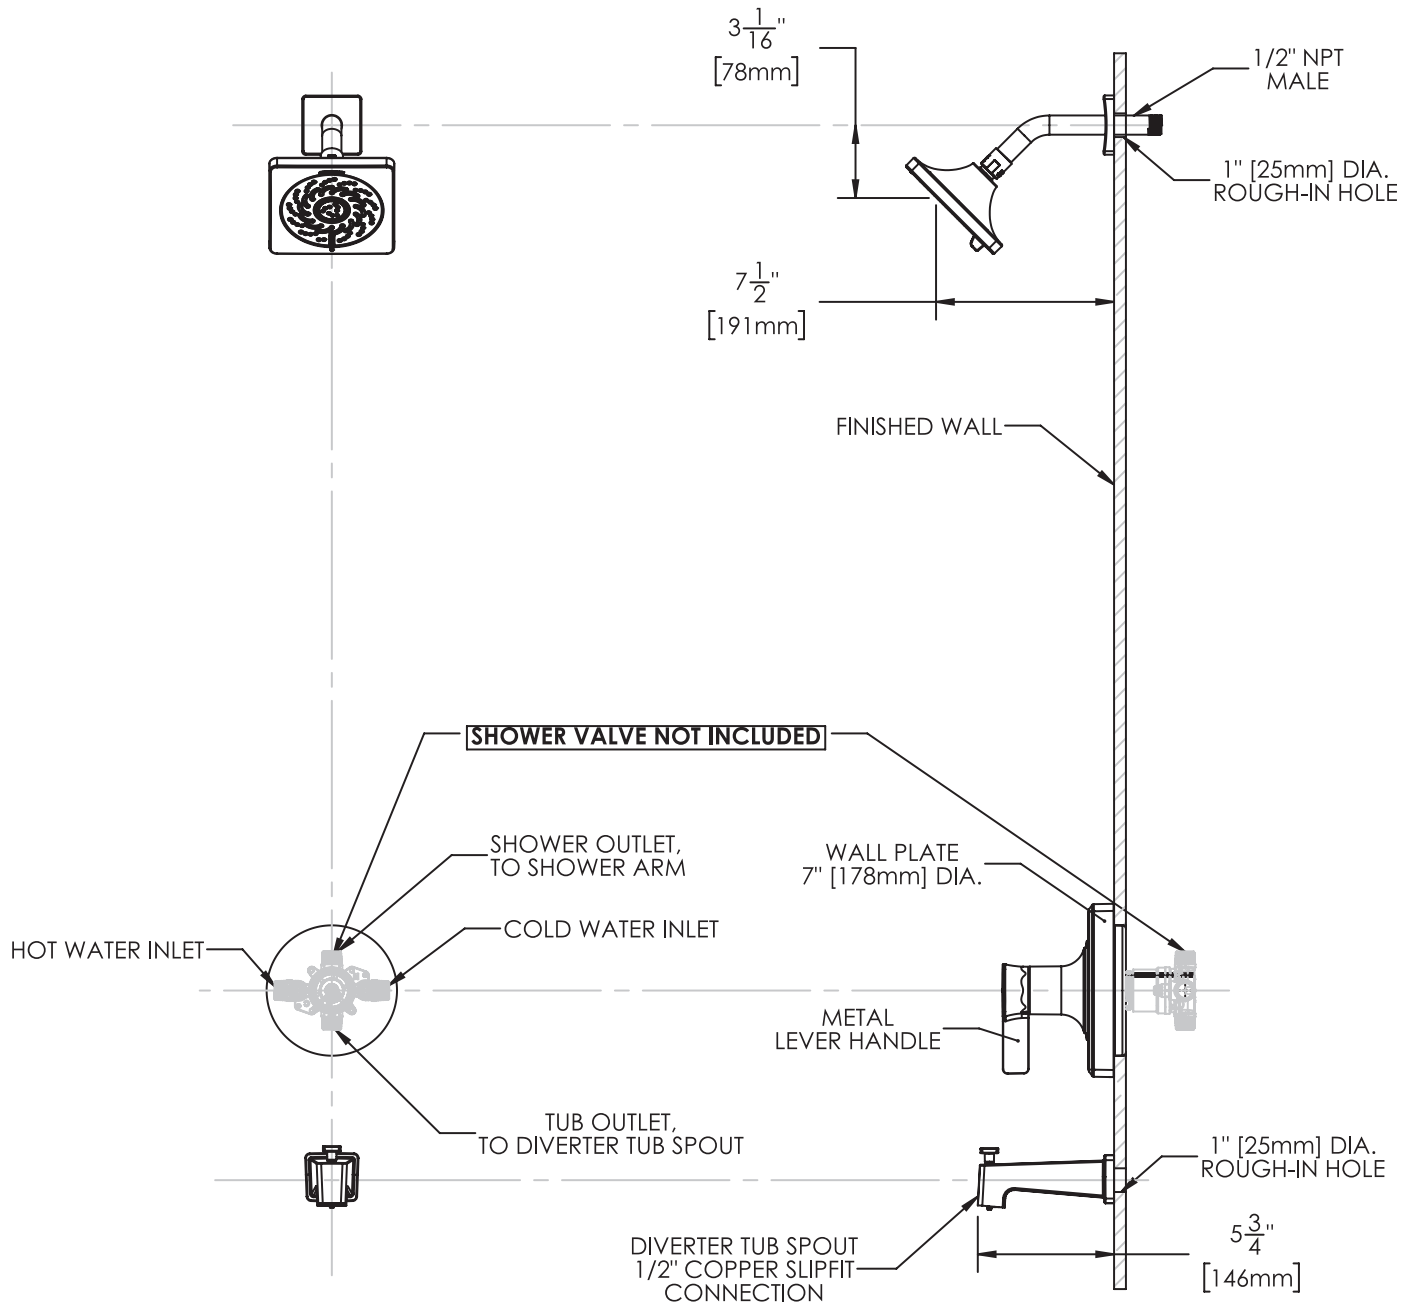

1. All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice. 2. Unless otherwise specified all inlets and outlets are 1/2" female copper sweat and 1/2" male npt. 3. For ADA mounting locations consult ADAAG, ANSI A117.1 or state regulations.

Architect/Engineer Approval Space:

P: 800-537-2107
 F: 800-977-2747
 W: WWW.SPEAKMAN.COM
 R: 01-JANUARY 2020