

# UNIVERSAL FIRE-RATED ACCESS DOORS - UFR

## FOR WALLS AND CEILINGS

The Milcor Universal Fire-Rated Door may be specified with confidence for service access in drywall, masonry or tile walls or ceilings where fire ratings are stipulated by code requirements.

### Specifications

- **Fire Rated:** Carries both UL and CUL 1 ½ hour, Class B fire rating, as well as the Warnock Hersey Label for three-hour noncombustible floor/ceiling systems.
- **Certified:** 250 degree temperature rise protection
- **Material:** 16-guage frame with 20-guage sandwich-type insulated door panel
- **Insulation:** 2" mineral fiber
- **Finishes:** Powder Coated Gray or Stainless Steel
- **Hinge:** Continuous Piano Hinge with stainless steel pin
- **Lock:** Self-latching paddle latch and locking system with key operated cylinder lock furnished with two keys and interior release mechanism. Other custom options available upon request.
- **Optional Colors:** Brilliant White, Gold Sand and Jet Black




Door Size**	Opening	Model No.	No. Cams	Masonry Anchors	Shipping Wt. Lbs.
8" x 8" * †	8½" x 8½"	3218-010-9	1	4	8
12" x 12"	12½" x 12½"	3218-012-9	1	4	10
12" x 24"	12½" x 24½"	3218-020-9	1	4	20
14" x 14"	14½" x 14½"	3218-014-9	1	4	16
16" x 16"	16½" x 16½"	3218-016-9	1	4	13
18" x 18"	18½" x 18½"	3218-018-9	1	4	17
22" x 30"	22½" x 30½"	3218-022-9	1	4	38
22" x 36"	22½" x 36½"	3218-027-9	1	4	43
24" x 24"	24½" x 24½"	3218-024-9	1	4	27
24" x 30"	24½" x 30½"	3218-023-9	1	4	41
24" x 36"	24½" x 36½"	3218-028-9	1	4	44
24" x 48" *	24½" x 48½"	3218-031-9	2	6	54
30" x 30" *	30½" x 30½"	3218-030-9	1	4	45
32" x 32" *	32½" x 32½"	3218-032-9	1	4	48
36" x 36" *	36½" x 36½"	3218-036-9	1	4	51
36" x 48" *	36½" x 48½"	3218-038-9	2	6	76
48" x 48" *	48½" x 48½"	3218-048-9	2	8	95

†Not available with Mortise cylinder


\*Wall rating only

**Note:** Stainless steel not available with Mortise cylinder

### Masonry Wall Installation Details

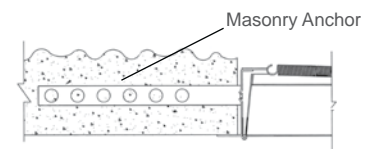

### Drywall Installation Details

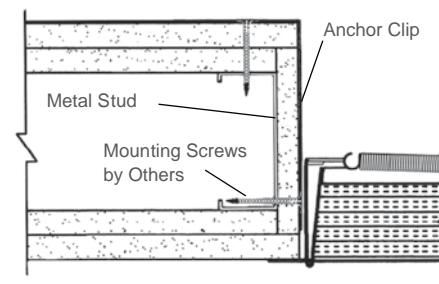

### Ceiling Installation Details

