

# Metal Roof Vent Sealing Adapter Multi-Flash Master Flash®

Specifically designed for **Metal Roofing Industry**

Advanced Ozone Resistance tested to...	EPDM 70 hour @ 500 pphm	
High Temperature Resistance Tested to	Intermittent Continuous	+135°C (+275°F) +100°C (+212°F)
Low Temperature Resistance tested to...	- 55°C (-67°F)	
Compression Set Maximum...	25%	

\*Complete specification data and testing methods are available upon request.

Available in three EPDM colors Black, Gray, and Dark Gray

## Applications:

Turbine Vents • Roof Exhaust Fans • Metal Roof Vents  
Roof Caps • Goose Neck Air Vent

## Weather Protection

Made of EPDM or High Temp Red Silicone,

These flashings are compounded specifically for maximum resistance to weathering due to ozone and ultraviolet light.



### Ribbed Canals


The ribbed canals allows for maximum flexibility, without affecting performance.

### Adaptable Base

The base is designed to mold to most panel configurations and roof pitches regardless of pipe location.

### Sleeve flexibility

Sleeve flexibility absorbs vibration and movement caused by expansion/contraction.

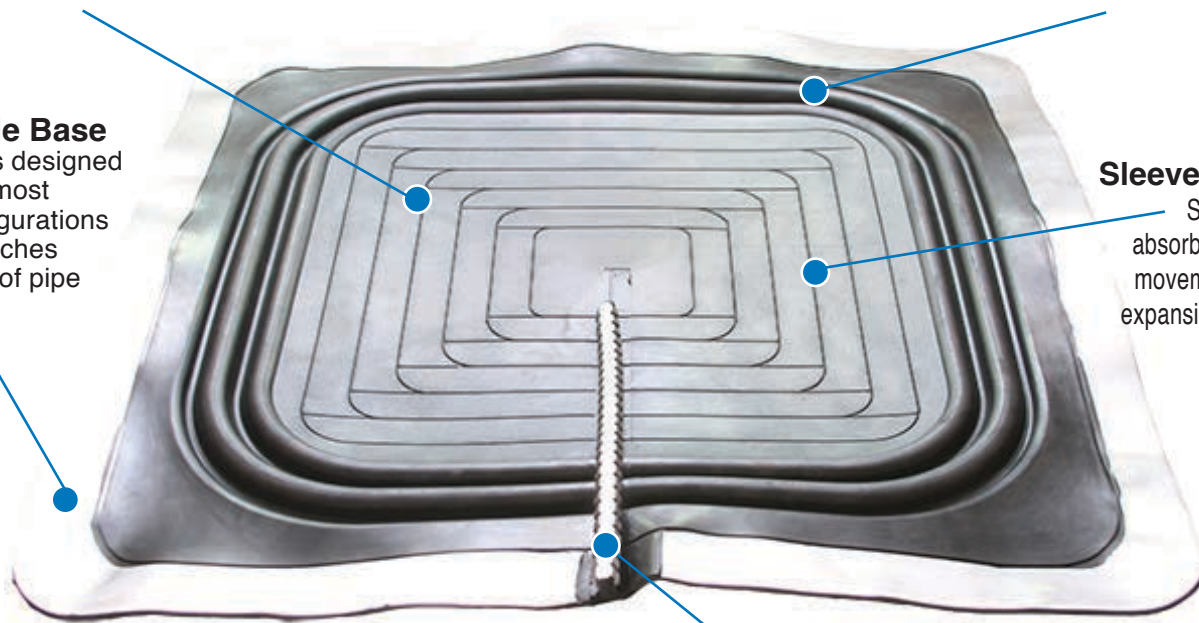


Stainless Steel Gripper & Aluminum Termination Strips for Retrofit Applications Included



### Standard or Retrofit Application

Turn the standard application into a retrofit by cutting down the center and adding the stainless steel gripper.



### Roof Vent Sealing Adapter Multi-Flash Flashing Details

A-Top Opening	Closed
B-Overall Height	1/4" (6mm)
C-Base	24" (609mm)