


2390 Floor Drain with Square Fixed Top – Slotted Grate

Regularly Furnished: Painted cast iron floor drain with anchor flange, seepage openings, ductile iron slotted grate, medium sump body, secondary dome strainer, ½” NPT trap primer tap (plugged) and bottom outlet.
 ASME Load Rating = S.D. (Special Duty) Over 10,000 Lbs.(D.I. Top) – L.D.(Light Duty) Under 2,000Lbs. (NB Top)

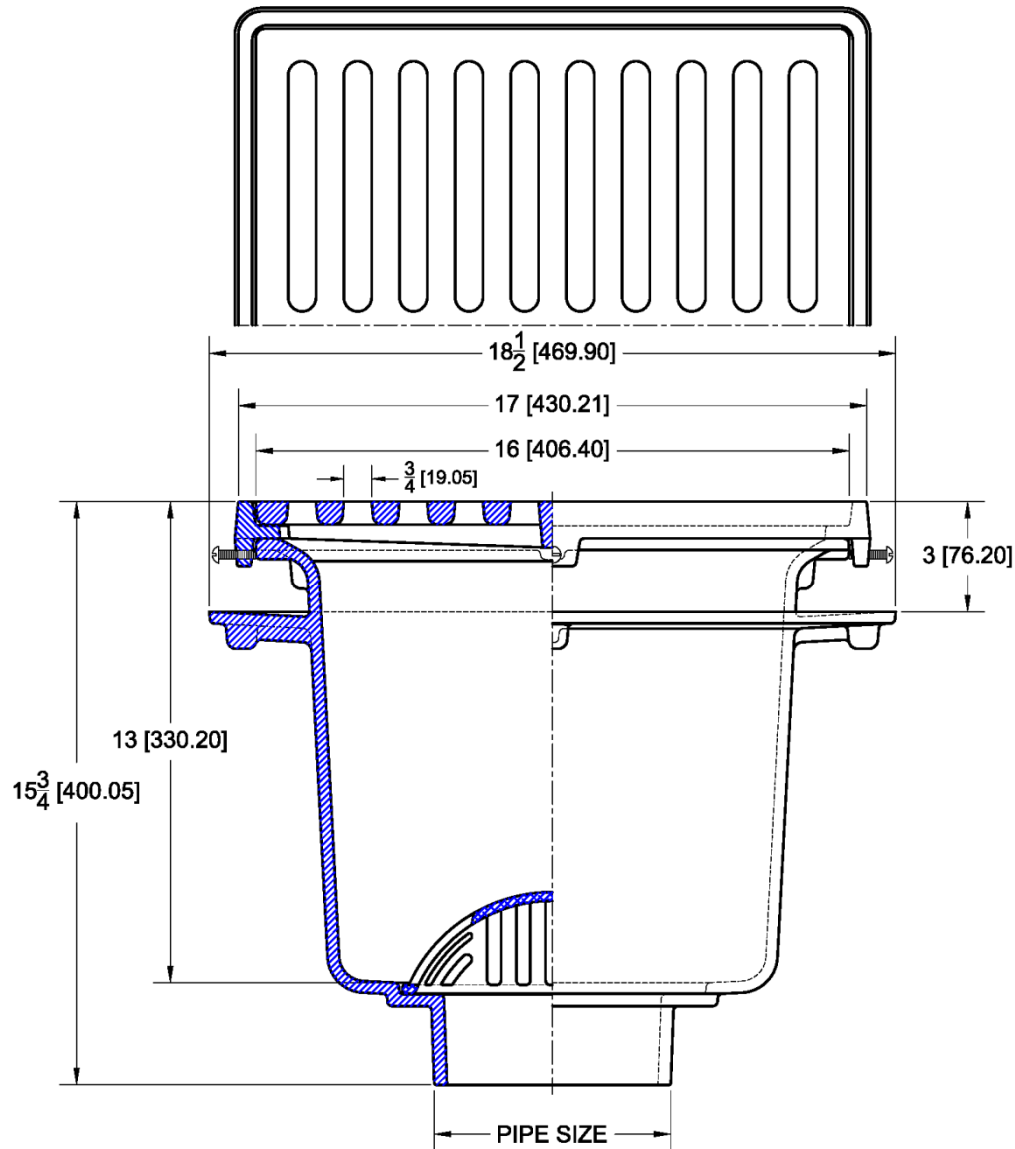

Top Material		
✓	Suffix	Description
	-1	Satin Finish Nickel Bronze
	-2	Satin Finish Bronze
	-12	Ductile Iron
	-102	Polished Chrome Plated Brass
	-304	Satin Finish 304 Stainless Steel Veneer

Outlet Variations		
✓	Type	Designation
	No-Hub	4NH, 6NH, 8NH

Options		
✓	Suffix	Description
	-ARC	Acid Resistant Coating (C.I. Parts)
	-TSD	Trap Seal Device (Model 4405)
	-VP	Vandal Proof Secured Grate
	-26	Clamp Device
	-27	Sediment Bucket
	-31	Backwater Valve (2,3,4" Only)
	-39	Galvanized Iron Parts
	-123	Stainless Steel Mesh Lined Bucket