

SentinelPro™ Diverter Trim, Shower and Tub Package (Valve not included)

## FEATURES:

- CPT-5401: Diverter Shower Valve Trim
- S-2272-E2: 2.0 GPM (7.6 L/min) Flow Rate Shower Head
- S-2500: Shower Arm and Flange
- VS-100-PC: 2.5 GPM (9.5 L/min) Hand Held Shower with Pause/Trickle Button
- VS-115: Supply Ell with Wall Flange
- VS-117: Vacuum Breaker
- S-1554: Tub Spout
- CPT-1183: Transfer Valve Trim (Valve not included)
- VS-145 : 69 in. Metal Stainless Steel Hose

## VALVE OPTIONS:

- CPV-TP2-DV: Thermostatic/Pressure Balancing Diverter Valve  
Sweat & Thread Connections
- CPV-TV: Two-Way Diverter Valve  
for use with CPT-1183

## STANDARDS:

- ASME A112.18.1/CSA B125.1 certified
- ADA Compliant

## STOCK FINISHES:



PC

## WARRANTY:


Visit [www.speakman.com](http://www.speakman.com) for full product warranty information

- See [Speakman.com](http://Speakman.com) For Warranty Information



Information continues on next page

## SentinelPro™ Diverter Trim, Shower and Tub Package (Valve not included)

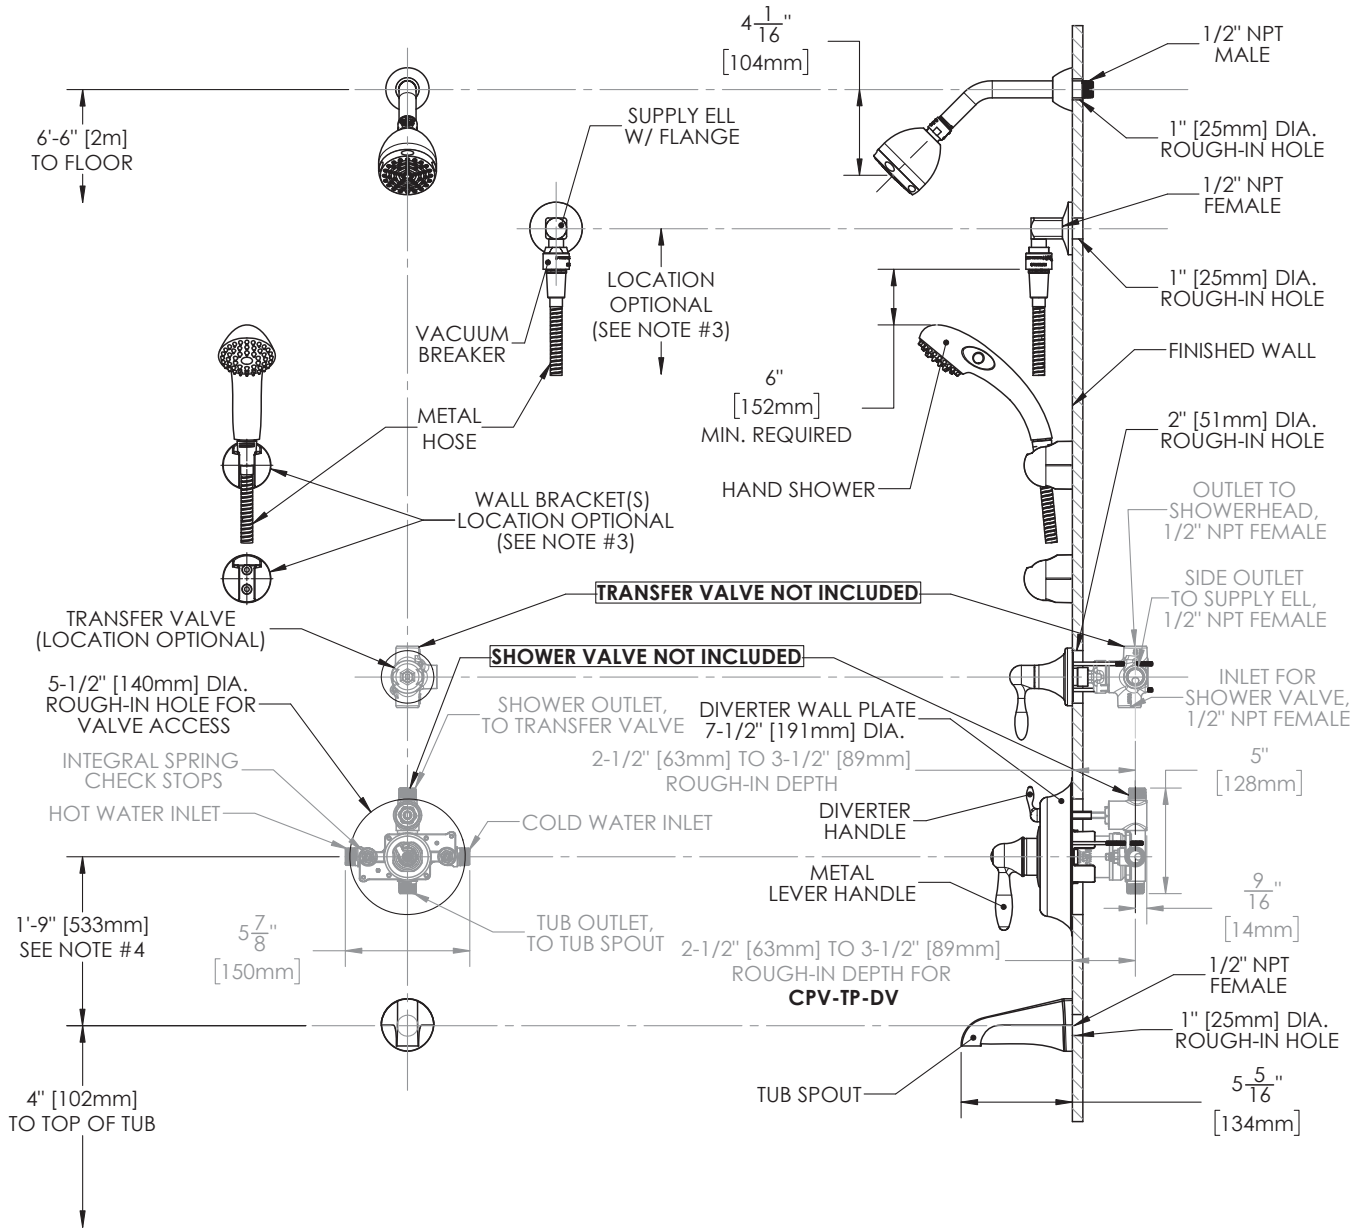

### NOTES:

1. ALL DIMENSIONS ARE IN INCHES [MILLIMETERS] UNLESS OTHERWISE SPECIFIED AND ARE SUBJECT TO CHANGE WITHOUT NOTICE.
2. THE LOCATIONS OF THE WALL BRACKETS(2) AND SUPPLY ELL ARE OPTIONAL, BUT RESTRICTED BY THE 69" HOSE LENGTH RUNNING FROM THE SUPPLY ELL CONNECTION TO THE HAND SHOWER AND THE 6" MINIMUM REQUIREMENT BETWEEN THE IN-LINE VACUUM BREAKER AND TOP OF THE HAND SHOWER (HAND SHOWER ADJUSTED TO HIGHEST POSITION).
3. FOR ADA MOUNTING LOCATIONS CONSULT ADAAG, ANSI A117.1, OR STATE REGULATIONS.