


2350 Floor Drain with Square Fixed Top – Perforated Grate

Regularly Furnished: Painted cast iron floor drain with anchor flange, seepage openings, ductile iron perforated grate, medium sump body, 1/2" NPT trap primer tap (plugged) and bottom outlet.
 ASME Load Rating = X.H. (Extra Heavy Duty) 7,500-10,000 Lbs.

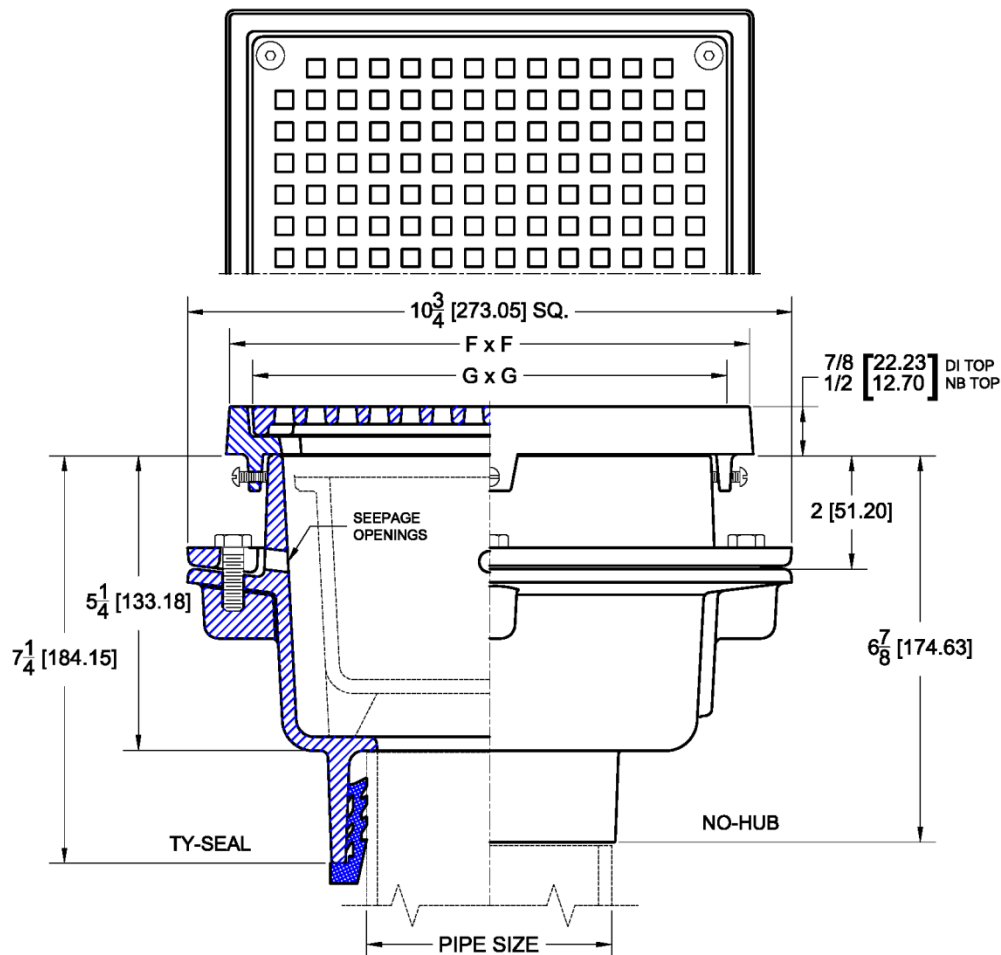

TOP ASSEMBLY	F (Square)	G (Square)
NICKEL BRONZE	8 1/2 (216)	7 1/2 (191)
DUCTILE IRON	9 1/4 (235)	8 1/2 (216)

Top Material		
✓	Suffix	Description
	-1	Satin Finish Nickel Bronze
	-2	Satin Finish Bronze
	-12	Ductile Iron
	-102	Polished Chrome Plated Brass
	-304	Satin Finish 304 Stainless Steel Veneer

Outlet Variations		
✓	Type	Designation
	No-Hub	2NH, 3NH, 4NH
	Push-On	2TY, 3TY, 4TY
	Inside Caulk	3IC, 4IC

Options		
✓	Suffix	Description
	-ARC	Acid Resistant Coating (C.I. Parts)
	-TSD	Trap Seal Device (Model 4405)
	-VP	Vandal Proof Secured Grate
	-8	Secondary Strainer
	-14	Hinged Grate
	-26	Clamp Device
	-27	Sediment Bucket
	-31	Backwater Valve (2,3,4" Only)
	-39	Galvanized Iron Parts
	-123	Stainless Steel Mesh Lined Bucket