

Gooseneck Battery Sensor Faucet

MODELS:

- SF-9100: Gooseneck Battery Sensor Faucet
- SF-9100-TMV: Gooseneck Battery Sensor Faucet w/ Thermostatic Mixing Valve

FEATURES:

- Brass construction with polished chrome finish
- Sensor eye at base of faucet
- Powered by six (6) AA batteries includes
- Gooseneck spout
- 60 second flow time out feature
- 9/16"-24 UNF supply connection, supply lines not included
- Vandal-resistant 0.5 GPM (1.89 L/min) flow control

OPTION:

- TMV: Thermostatic Mixing Valve (A-TMV)

ADD-ONS:

- A-SF-GBLFE: alternate flow aerator group (1.5 GPM, 1.5 GPM laminar and 1.2 GPM)
- A-EA12: 13/16-27 1.2 GPM Aerator
- A-ELF: 13/16-27 1.2 GPM Laminar Flow Aerator
- A-UCM: Under Counter Mixer & Mounting Hardware
- A-HTS – Sensorflo HTS Flex Hose Kit
- RPG76-107259:AC Adapter for Battery Sensor Faucets
- SF-4DECK: 4 in. deck plate
- SF-8DECK: 8 in. deck plate

STANDARDS:

- ASME A112.18.1/CSA B125.1 certified
- NSF/ANSI 61 certified
- NSF/ANSI 372 certified
- ADA compliant

WARRANTY:

Visit www.speakman.com for full product warranty information

- Limited Lifetime Warranty (residential)
- 5 Year Limited Warranty (commercial)




Information continues on next page

All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice.

Architect/Engineer Approval Space:

P: 800-537-2107
F: 800-977-2747
W: WWW.SPEAKMAN.COM
R: 04-NOVEMBER 2021

Gooseneck Battery Sensor Faucet

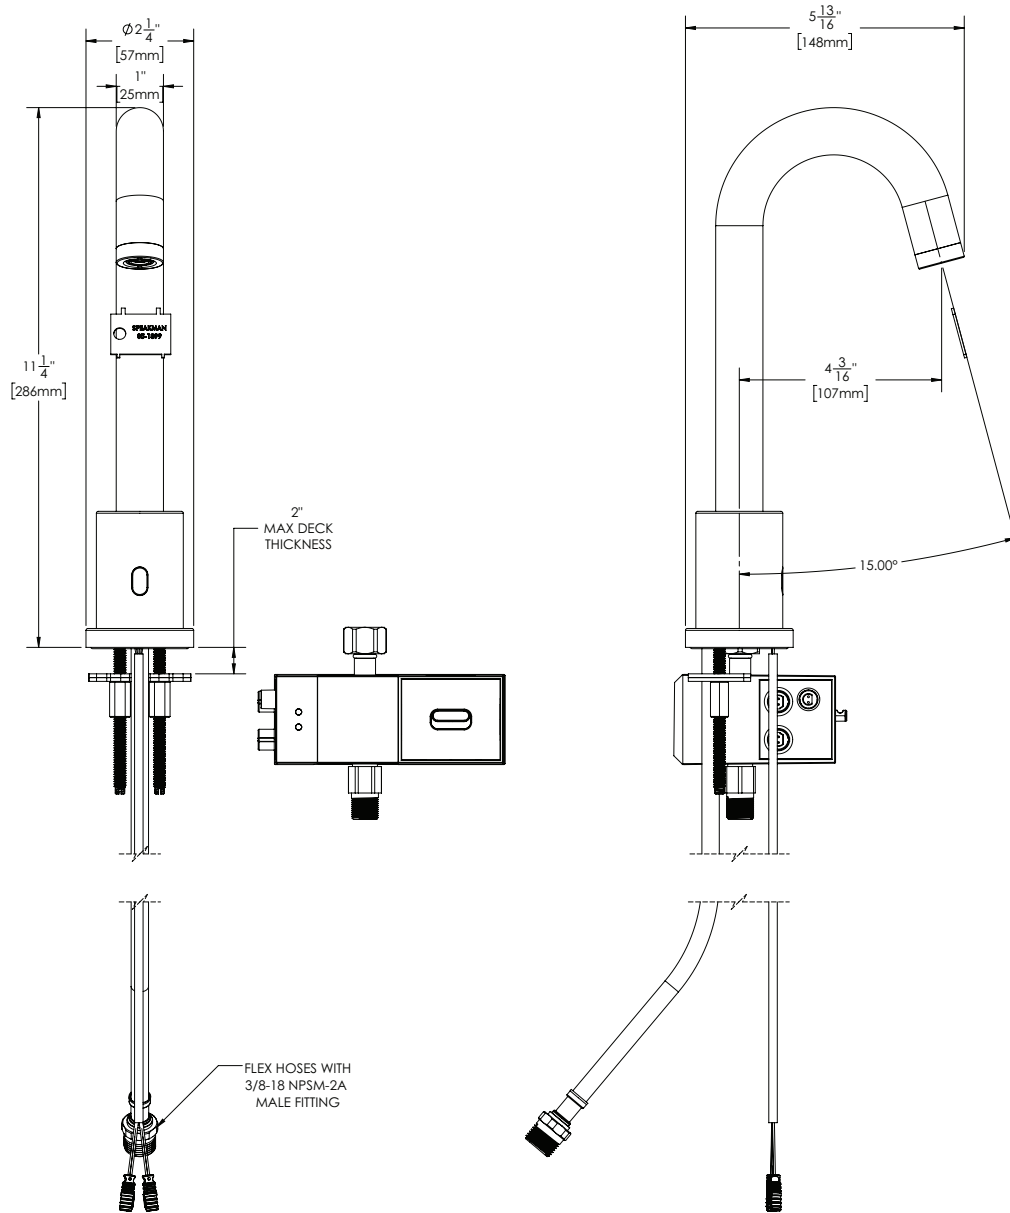

All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice.

Architect/Engineer Approval Space:

P: 800-537-2107
 F: 800-977-2747
 W: WWW.SPEAKMAN.COM
 R: 04-NOVEMBER 2021