

PLANTING AREA DRAIN

FOR LARGE AREAS

FUNCTION: The perforated standpipe, when surrounded by gravel fill, provides drainage of excess water from the planting or flower box. Top of standpipe is set at ground level and protected by dome cap. Excess surface water overflows into top of standpipe.

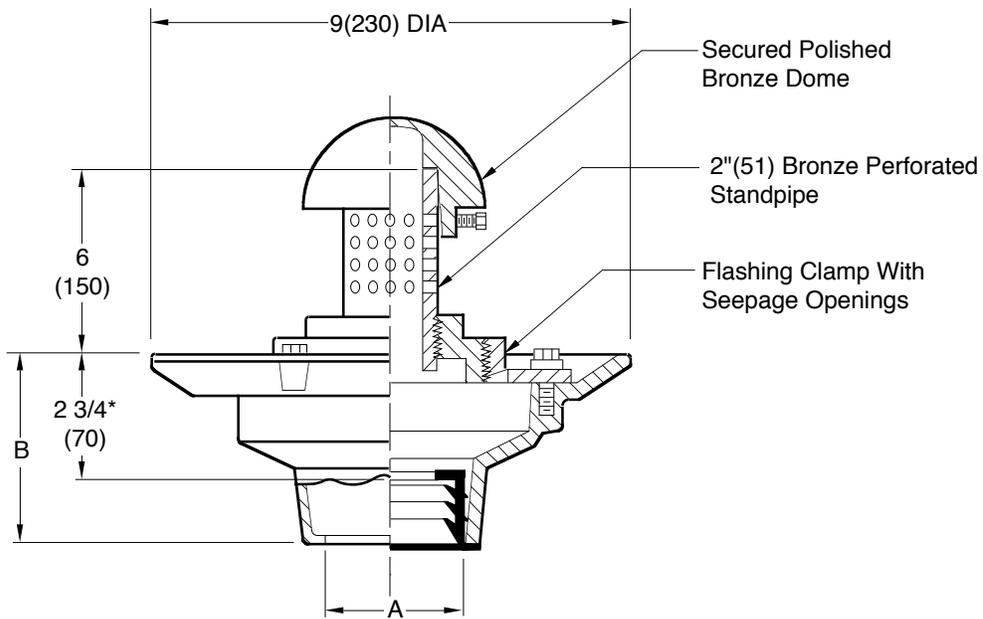


Fig. 2680C ... CAULK OUTLET
 Fig. 2680Y ... NO-HUB OUTLET

*This dimension to Internal Stop of Speedi-Set Gasket.

NOTE: Clamp can be reversed.

A SIZE	02(50)	03(80)	04(100)
B	4(100) for Caulk, NO-HUB and Speedi-Set 3(76) for Threaded		

2680

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

REGULARLY FURNISHED:
 Duco Cast Iron Body and Flashing Clamp with Bronze Standpipe and Polished Bronze Dome.

NOTE: Dimensions shown in parentheses are in millimeters.

- VARIATIONS:**
- Longer Standpipe (When Specified)
 - Solid Standpipe -SP
 - Standpipe Covered w/SS Mesh -SSM
 - L Speedi-Set Service Weight
 - LXH Speedi-Set Extra Heavy
 - T Threaded Outlet

- OPTIONAL MATERIALS:**
- Chrome Plated Dome -CPD
 - Galvanized Body -G
 - Nickel Bronze Dome and Stainless Steel Standpipe -NBD
 - Rough Bronze Dome -RBD

FIGURE NUMBER	B	5-22-95	Revised and added millimeters	CMB	BS	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
	A	11-17-93	Submittal Update	EMB	BS			2680
	REV.	DATE	DESCRIPTION	BY	CKD. BY			