


1891 Area Drain – Slotted Grate

Regularly Furnished: A.R.C. coated fabricated steel drain with ductile iron slotted grate, cast iron secondary dome strainer and bottom outlet. ASME Load Rating = X.H. (Extra Heavy Duty) 7,500-10,000Lbs.

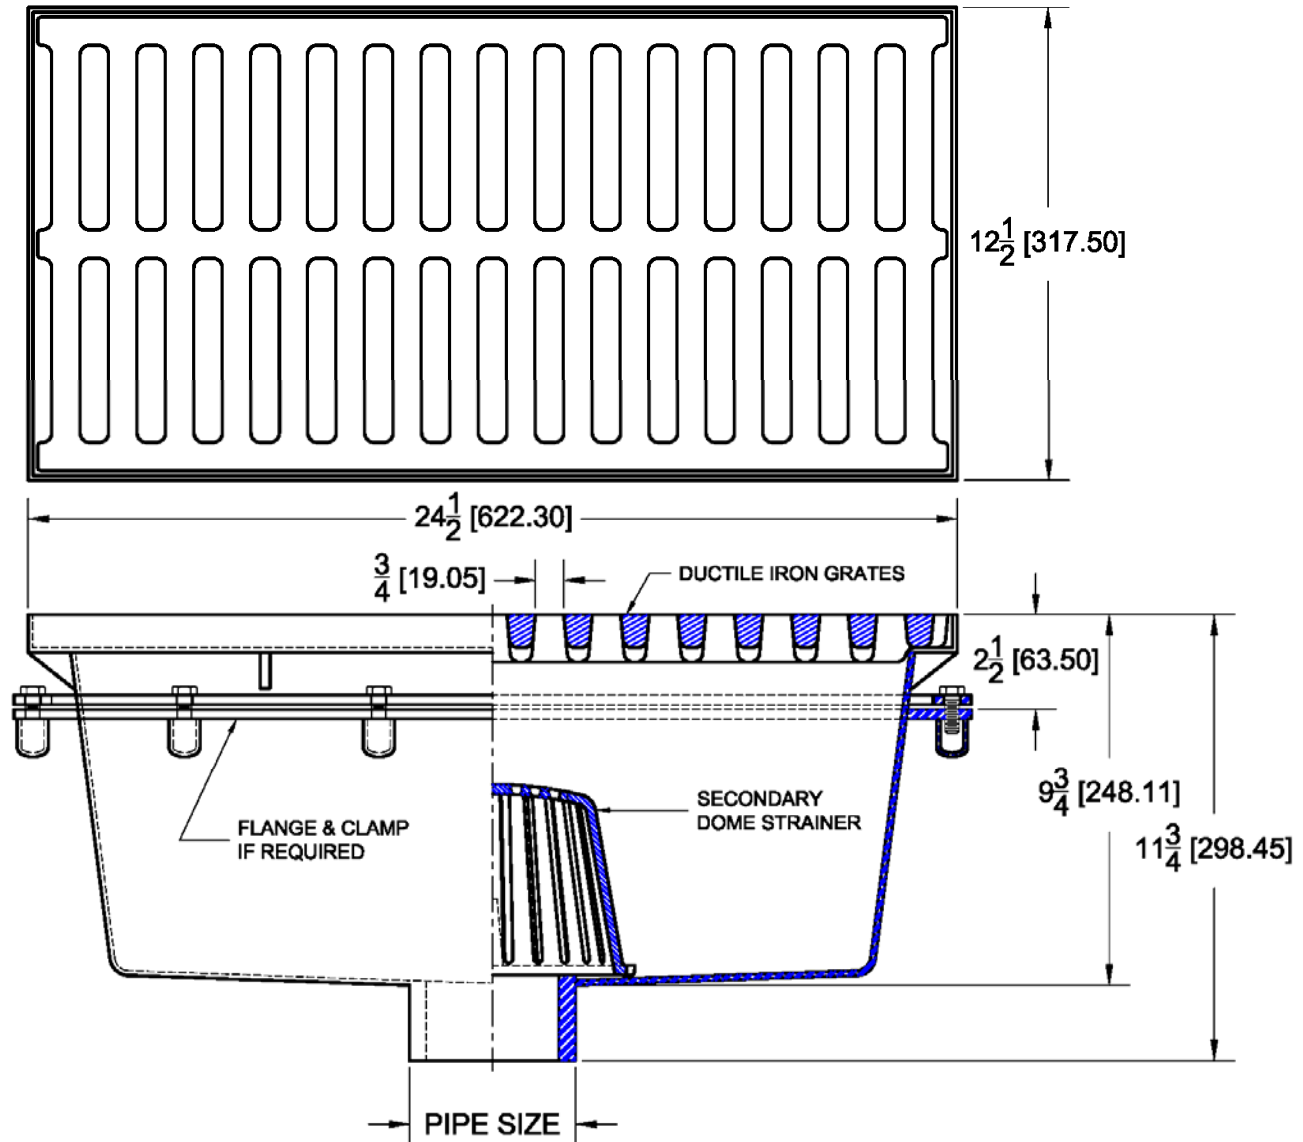

Top Material		
✓	Suffix	Description
	-1	Satin Finish Nickel
	-2	Satin Finish Bronze
	-12	Ductile Iron
	-304	Satin Finish 304 Stainless Steel Veneer

Outlet Variations		
✓	Type	Designation
	No-Hub	3NH, 4NH, 6NH
	Push-On	3TY, 4TY
	Inside Caulk	3IC, 4IC, 6IC

Options		
✓	Suffix	Description
	-SO	90 Degree Side Outlet (3NH, 4NH, 6NH)
	-VP	Vandal Proof Secured Grate
	-11	Heel Proof Grate (w/ Veneer Top Only)
	-18	Solid Cover
	-24	Anchor Flange
	-26	Anchor Flange w/ Clamp Device
	-31	Backwater Valve (3,4" Only)
	-39	Galvanized Iron Parts