


## 3101 14" Square Promenade Deck Drain (Replaces 3100-M)

|            |  |
|------------|--|
| Project    |  |
| Engineer   |  |
| Mechanical |  |

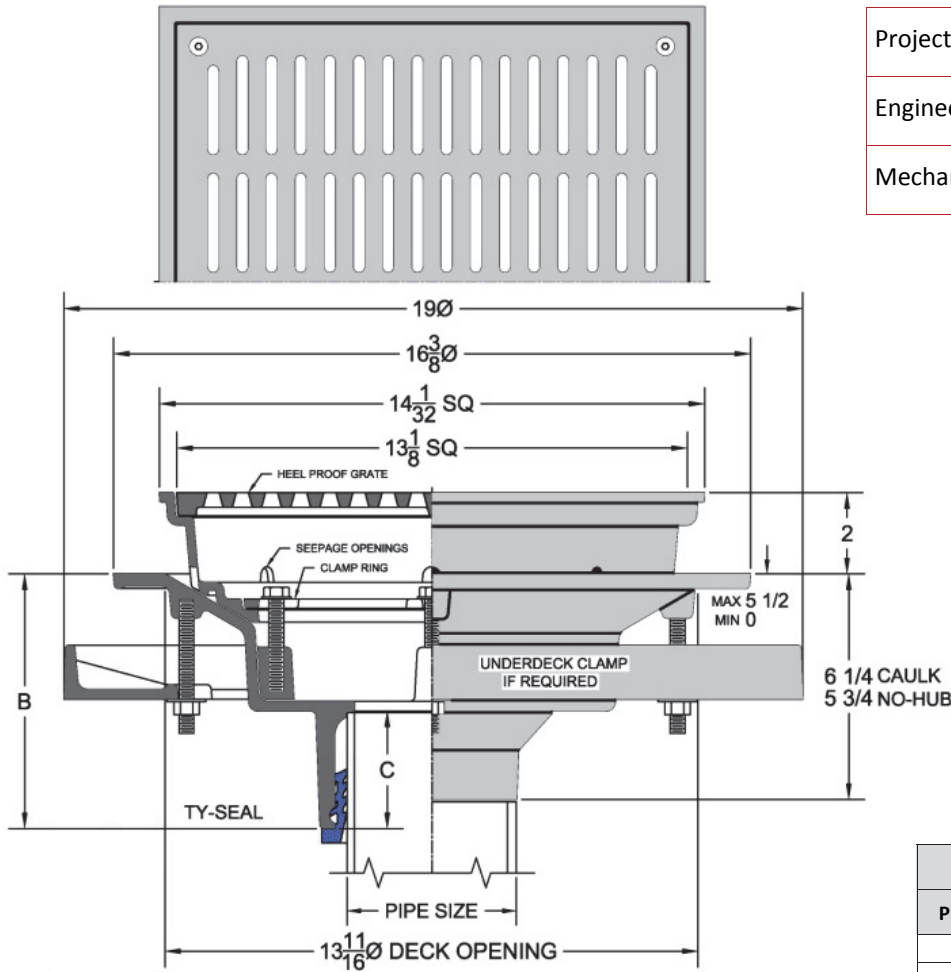

| Dimensions (In.) |       |       |
|------------------|-------|-------|
| Pipe Size        | B     | C     |
| 2"               | 6 3/8 | 2 1/2 |
| 3"               | 6 5/8 | 2 3/4 |
| 4"               | 6 7/8 | 3     |
| 6"               | 6 3/8 | 3     |

| 3101 | -1<br>Cast Iron Body<br>with Satin Finish<br>Nickel Bronze Top | -2<br>Cast Iron Body<br>with Satin Finish<br>Bronze Top | -12<br>Cast Iron Body<br>with Ductile<br>Iron Top | Grate Free Area<br>(Sq.In.) |
|------|--|---|---|-----------------------------|
| •    |  |   |   | 46.5                        |

**Regularly Furnished:** Cast iron deck drain with flange, flashing ring, gravel stop, & secured grate.

| Optional Extensions |                                      |          |
|---------------------|--------------------------------------|----------|
| Suffix              | Description                          | •        |
| -ADF                | Adjustable Extension*                | Painted  |
|                     |                                      | -39 Galv |
| -AE                 | Adjustable Deck Riser*               | Painted  |
|                     |                                      | -39 Galv |
| -DF                 | Fixed Extension (1", 2", 3" or 4") * | Painted  |
|                     |                                      | -39 Galv |
| -EB                 | Adjustable Drain Extension Pan*      |          |

\*Dimensions vary from illustration

| Suffix Options |  |   |
|----------------|--|---|
| Suffix         | Description                                    | • |
| -ARC           | Acid Resistant Coating                         |   |
| -DFS           | Perforated Stainless Steel Extension (1"-4") * |   |
|                | For Each Additional 1" (Add / In.)             |   |
| -E             | Elastomeric Flange*                            |   |
| -SO            | 90 Degree Side Outlet (3NH,4NH,6NH*            |   |
| -VP            | Vandal Proof Top Assembly                      |   |
| -8             | Secondary Strainer                             |   |
| -39            | Galvanized Cast Iron                           |   |
| -52            | Sump Receiver*                                 |   |
| -53            | Under-Deck Clamp*                              |   |
| -189           | Bearing Pan w/ Clips & Securing Hardware*      |   |

| Outlet Variations |                               |   |
|-------------------|-------------------------------|---|
| Type              | Designation                   | • |
| Inside Caulk      | 2IC,3IC,4IC,5IC,6IC           |   |
| No-Hub            | 2NH,3NH,4NH,5NH,6NH,8NH       |   |
| Push On Gasket    | 2TY,3TY,4TY,6TY(CI),6TX(PVC)  |   |
| Threaded          | 2IPS,3IPS,4IPS,5IPS,6IPS,8IPS |   |