
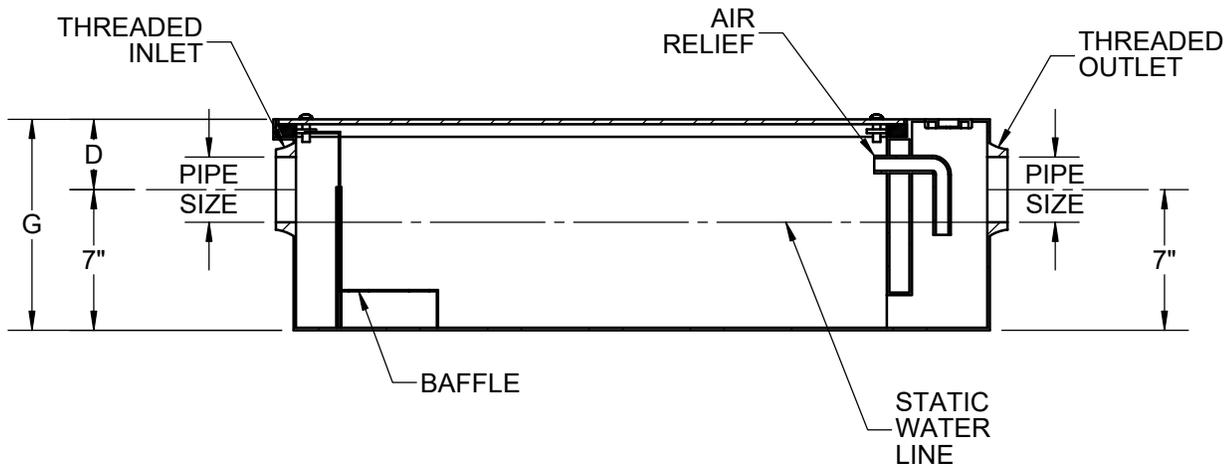


**SPECIFICATION:**

JOSAM 60110A SERIES EPOXY COATED FABRICATED STEEL GREASE INTERCEPTOR, SHALLOW TYPE, THREADED CONNECTIONS, INTERNAL AIR-RELIEF, VISIBLE DOUBLE WALL TRAP, REMOVABLE BAFFLE, GASKETED NON-SKID COVER AND FLOW CONTROL FITTING.

**GREASE INTERCEPTOR  
MANUAL LOW TYPE**

SERIES **60110A**

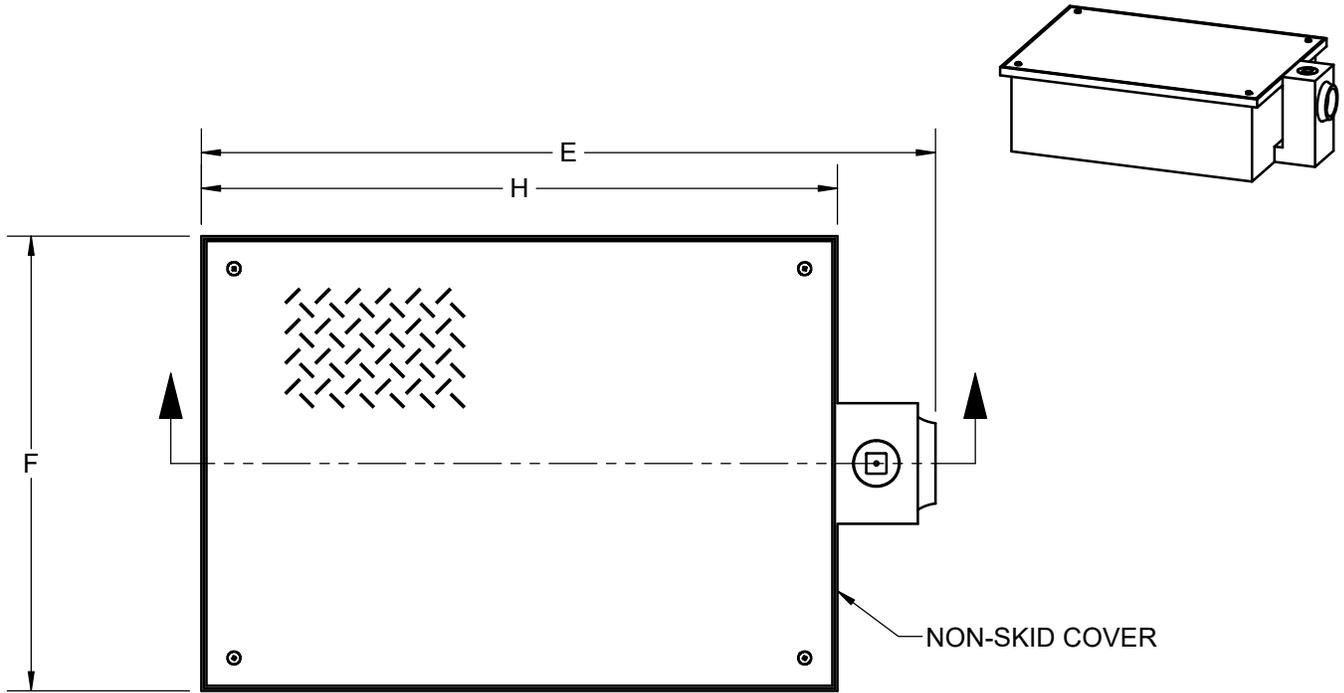

-65	HUB INLET, SPIGOT OUTLET 2"
-66	HUB INLET, SPIGOT OUTLET 3"
* -68	3" INLET & OUTLET (AVAILABLE ON STD. 2" SIZES)
-85	ENZYMATIC PORT IN COVER
-SS	FABRICATED STAINLESS STEEL MATERIAL

TYPE	FLOW RATE	CAP. (LBS.)	PIPE SIZE	D	E	F	G	H
60115A	20	40	*2"	3-1/2	36-3/8	22-5/8	10-1/2	31-5/8
60117A	35	70	3"	4-1/2	47-3/4	28-5/8	11-1/2	42-5/8

\* 2" SIZES NORMALLY FURNISHED WITH 3" x 2" REDUCING BUSHING

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

DATE OF LAST CHANGE: 06/15/18

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCES AND CHANGE WITHOUT NOTICE. WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA.



NOTES