


Termination Bars TB, TB-AP, TB-SL, TB-RSL, TB-R, TB-LB

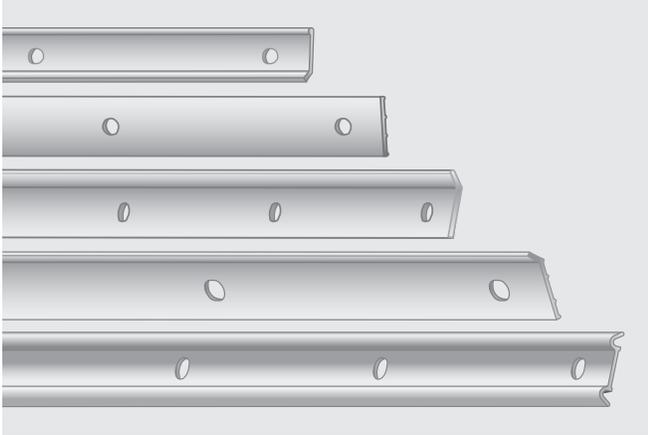

Application


Wall termination application

Features and Benefits

- Manufactured from specialty extruded aluminum without sharp edges
- Reinforced strengthening ribs allow for use in high wind applications

Product Selection

Material No.	Product Type	Hole Spacing	Description	Carton Wt. (lbs.)	Carton Qty.
791391	0.050" All Purpose	6"	TB-AP-0.05x1x120-6o.c.-TUBE	45	500 feet (50-10 ft pcs)
791394	0.075" Single Lip	6"	TB-SL-0.075x1x120-6o.c.-TUBE	51	500 feet (50-10 ft pcs)
791395	0.075" Ribbed Single Lip	6"	TB-RSL-0.075x1x120-6o.c.-TUBE	51	500 feet (50-10 ft pcs)
791404	0.100" Ribbed Flat	6"	TB-R-0.1x1x120-6o.c.-TUBE	78	500 feet (50-10 ft pcs)
791411	0.090" Lip and Ball	6"	TB-LB-0.09-TUBE	86	500 feet (50-10 ft pcs)

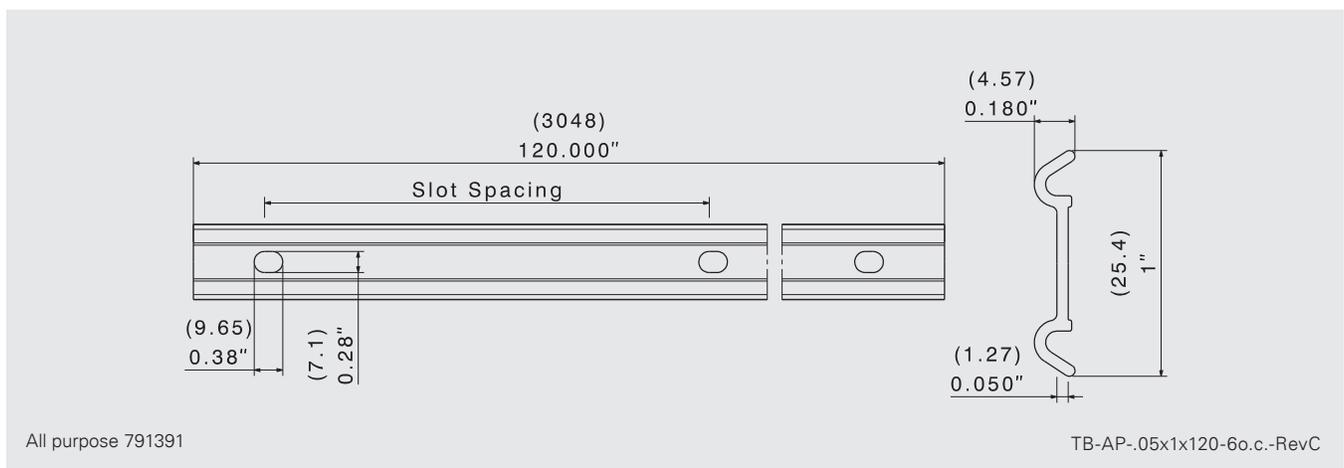

Dimensions: 0.050" thick x 1" wide
 1.27 mm thick x 25.4 mm wide
 Length: 10 ft. (3.05 m)


Fastener Holes: 0.28" x 0.38" (7.1 mm x 9.65 mm)
 Slot Spacing: 6" o.c. (152.4 mm o.c.)
 Material: 6063-T6 Extruded Aluminum

US
 T 800 234 4533
 www.sfsintecusa.com

Canada
 T 866 847 5400
 www.sfsintec.ca


The details stated are results of tests and/or calculations and therefore are non-binding and do not represent warranties or warranted characteristics for not specified applications. All calculations therefore have to be checked and approved by the responsible planner ahead of execution. The user is responsible to assure compliance with all applicable laws and regulations.

Termination Bars TB, TB-AP, TB-SL, TB-RSL, TB-R, TB-LB

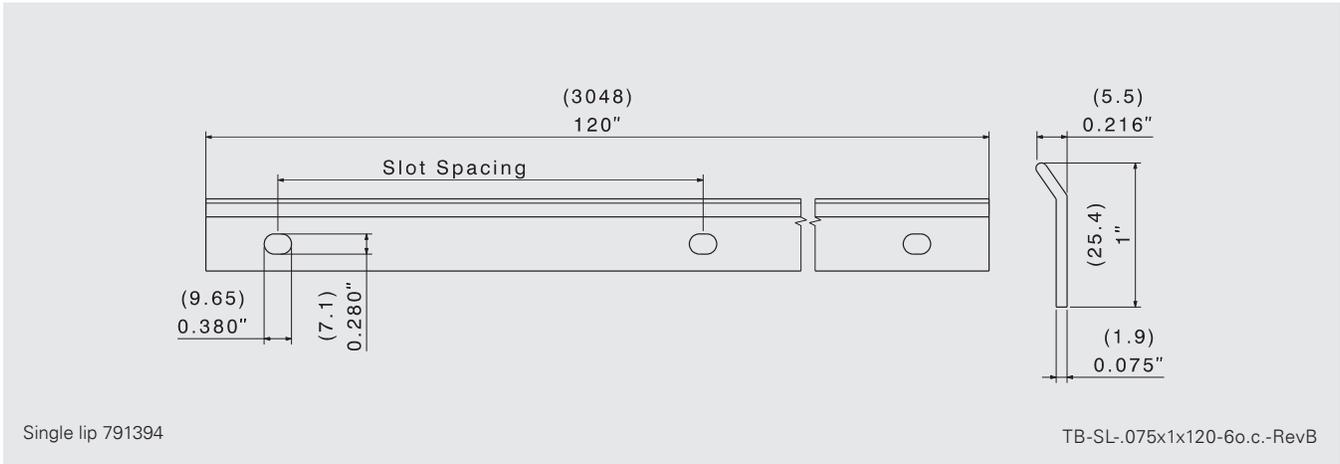

Dimensions: 0.075" thick x 0.216" lip x 1" wide
 1.90 mm thick x 5.5 mm lip x 25.4 mm wide
 Length: 10 ft. (3.05 m)


Fastener Holes: 0.280" x 0.380" (7.1 mm x 9.65 mm)
 Slot Spacing: 6" o.c. (152.4 mm o.c.)
 Material: 6063-T6 Extruded Aluminum

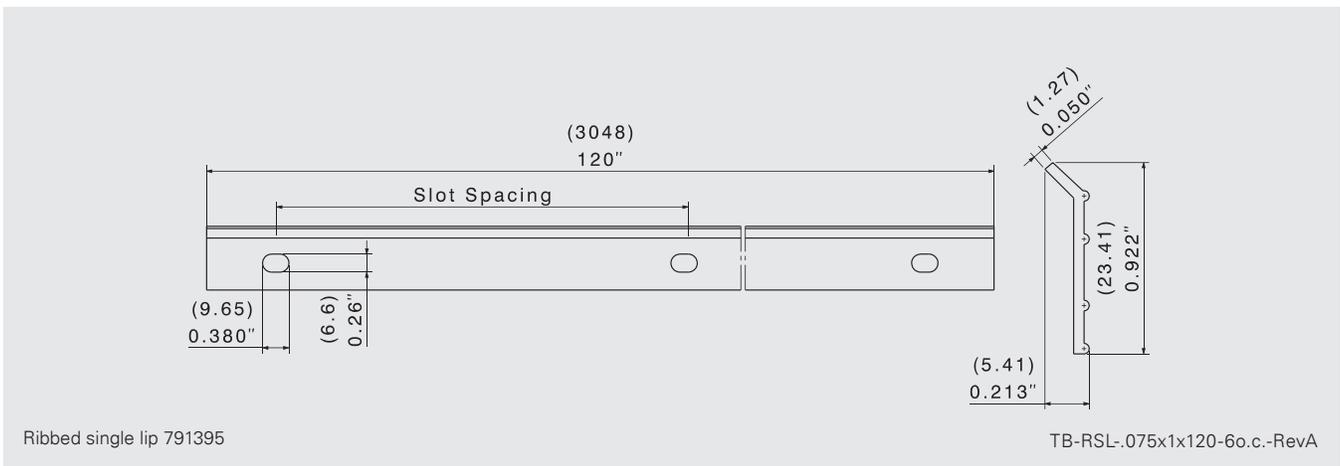

Dimensions: 0.050" thick x 0.213" lip x 0.922" wide
 1.27 mm thick x 5.41 mm lip x 23.41 mm wide
 Length: 10 ft. (3.05 m)


Fastener Holes: 0.260" x 0.380" (6.6 mm x 9.65 mm)
 Slot Spacing: 6" o.c. (152.4 mm o.c.)
 Material: 6063-T6 Extruded Aluminum

Termination Bars TB, TB-AP, TB-SL, TB-RSL, TB-R, TB-LB

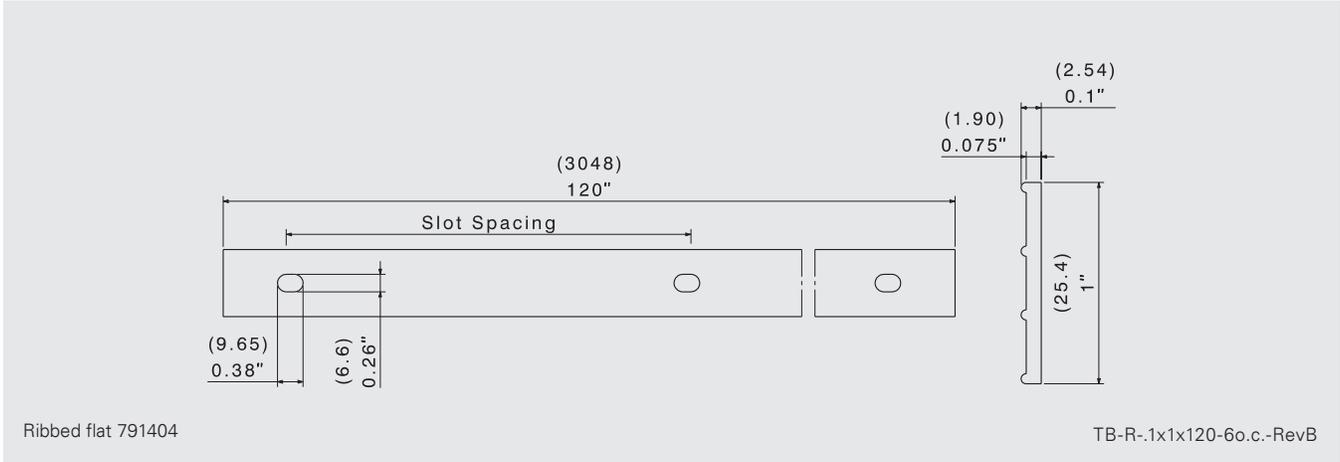

Dimensions: 0.075" thick x 0.100" ribs x 1" wide
 1.90 mm thick x 2.54 mm ribs x 25.4 mm wide
 Length: 10 ft. (3.05 m)

Fastener Holes: 0.260" x 0.380" (6.6 mm x 9.65 mm)
 Slot Spacing: 6" o.c. (152.4 mm o.c.)
 Material: 6063-T6 Extruded Aluminum

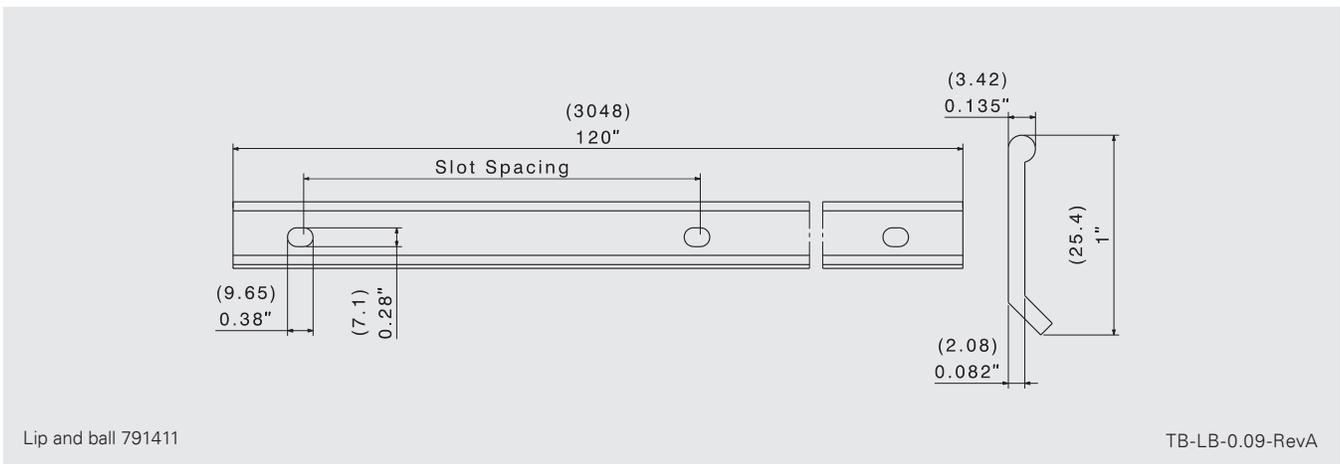

Dimensions: 0.082" thick x 1" wide
 2.08 mm thick x 25.4 mm wide
 Length: 10 ft. (3.05 m)

Fastener Holes: 0.28" x 0.38" (7.1 mm x 9.65 mm)
 Fastener Slot Spacing: 6" o.c. (152.4 mm o.c.)
 Material: 6063-T6 Extruded Aluminum

Installation and Application Considerations

Use with:

- ZAC® anchors
- Zinc nailins
- #14 Dekfast
- #15 Dekfast

Coating and Corrosion

15/15 Kesternich per FM 4470

US
 T 800 234 4533
 www.sfsintecusa.com

Canada
 T 866 847 5400
 www.sfsintec.ca

Metric values are approximate conversions.

The details stated are results of tests and/or calculations and therefore are non-binding and do not represent warranties or warranted characteristics for not specified applications. All calculations therefore have to be checked and approved by the responsible planner ahead of execution. The user is responsible to assure compliance with all applicable laws and regulations.