

## **BOTTLE FILLER**

### **BF12 Bottle Filler Series**

H<sub>2</sub>O TO GO!® SENSOR OPERATED BOTTLE **FILLER** 

#### STANDARD FEATURES

- ADA Compliant
- 100-Mesh Inlet Strainer
- 120VAC/9V DC Plug-In Transformer
- Hands-Free Sensor Operation
- 1 GPM Laminar Flow Nozzle
- 20 Second Maximum Run Time
- Fits existing Murdock A171, A172, Water Cooler Series
- May be used with certain competitor models (Contact Factory for more information)



Bottle Filler unit maybe used on certain existing Murdock® Manufacturing units or models which include Bottle Filler. Existing Drinking Fountain may require alteration for connection to Bottle Filler.

Unit to include Sensor operated activation with a 20 second maximum run time. Housing construction to be heavy gauge stainless steel with a #4 satin finish and to include components manufactured from antimicrobial, impact resistant ABS. LED Lights illuminate the Bottle Fill area and brighten when a bottle is detected. Bottle Filler shall provide approximately 1 GPM flow rate with a Laminar Flow Spout to minimize splashing. Optional BCD (Bottle Counter Display) indicates the quantity of 16 oz disposable Plastic Bottles saved from a land fill and also displays the Water Filter status. Optional WF1 shall provide a 1500-gallon capacity, with NSF/ANSI 42 & 53 certification to reduce Lead content in the drinking water by 99%. Optional Water Filter to be shipped loose for installation within Water Cooler unit.



Model BF12-BCD Shown

### MODEL:

(Must Specify)

Sensor Operated Bottle Filler ■ BF12

☐ BF12-BAT Sensor Operated Bottle Filler, Battery Powered

#### OPTIONS

(additional costs may be incurred)

Bottle Counter Display □ -BCD

#### Options Notes:













WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

MURDOCK MFG. • 15125 Proctor Avenue • City of Industry, CA 91746 USA Phone 800-453-7465 or 626-333-2543 • Fax 626-855-4860 • www.murdockmfg.com




<sup>&</sup>lt;sup>1</sup> Requires Electrical, Not Available on -BAT Battery Powered models.





# **BOTTLE FILLER**

## **BF12 Bottle Filler Series**

H<sub>2</sub>O TO GO!® SENSOR OPERATED BOTTLE FILLER



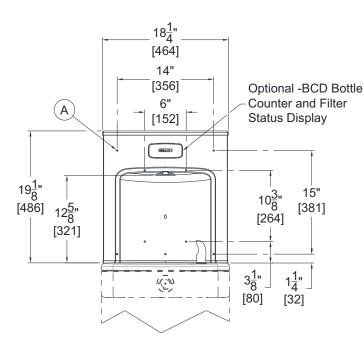

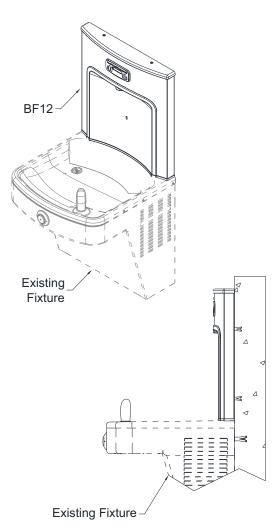

#### General Note:

1. All dimensions are in inches [MM]

 Ø1/4" Holes, 10 Places for Anchoring Hardware, provided by others

Murdock Mfg.™ warrants that its products are free from defects in material or workmanship under normal use and service for a period of 18 months from date of shipment. The sealed refrigeration system is warranted for five years. Murdock's liability under this warranty shall be discharged solely by replacement or repair of defective material, provided Murdock™ is notified in writing within one year from date of shipment, F.O.B. Industry, California.

SUMMARY AL FOR TURING	Model Number & Options	_Quantity
SUN	Company	
TION S PROV	Contact	
SELEC & AF MAN	Signature (Approval for Manufacturing)	_Date
	· · · · · · · · · · · · · · · · · · ·	

All dimensions are subject to manufactures tolerance of plus or minus ½" nominal and subject to change without notice. Murdock assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock Mfg.™, Member of Morris Group International™. Please visit www.murdockmfg.com for most current specifications.

**MURDOCK MFG.** • 15125 Proctor Avenue • City of Industry, CA 91746 USA Phone 800-453-7465 or 626-333-2543 • Fax 626-855-4860 • www.murdockmfg.com

Member of MORRIS GROUP