
## **Solar Multi-Port-AL Master Flash®**

## "Environmentally safe" lead free aluminum base.



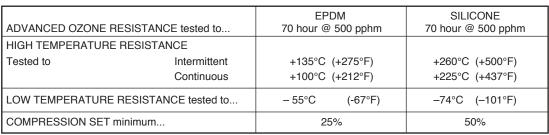

<sup>\*</sup>Complete specification data and testing methods are available upon request.

## "Environmentally safe" lead free aluminum base.



Weather Protection Made of E.P.D.M. or Silicone,

these flashings are compounded specifically for maximum resistance to weathering due to ozone and ultraviolet light.



**ONE** 0" - 1-15/16" - (0 - 49mm) Pipe

**TWO** 3/8" (9.6mm) pipe / cable

**TWO** 3/4" (20mm) pipe / cable

- 17-3/4" x 24" (450 x 600mm) Aluminum Base
- Up to 4 Cables or Wires per flashing
- Extra ports to accommodate Copper pipe and electrical cabling
- Easy install for Solar applications



## **Adaptable Base**

The base is designed to mold to most panel configurations and roof pitches regardless of pipe location.

	Pipe Range	Compound	Part No.
Solar Multi-Port AL	One center port 0" - 1-15/16" (0 - 49mm) Pipe Two ports up to 3/8"	Black EPDM	SMP-RS101BA
	(9.6mm) pipe / cable <b>Two</b> ports up to 3/4" (20mm) pipe / cable	Silicone	SMP-RS102RA



Flashing Details		
A-Top Opening Diameter	0" - 1-15/16" (0 - 49mm)	
B-Overall Height	2-1/2" (63mm)	
C-Base Diameter	17-3/4" x 24" (450 x 600mm)	

To see our complete product line go to www.aztecwasher.com





