DRAWING NUMBER

SUPERSEDED OR VOID DATA

Р

WE CAN ASSUME

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

NONE FOR USE

6-1-06

PROVED BY CEL

CHECKED

겅


DRAWN BY: RN

> FIGURE NUMBER


REV.

INLINE SOLIDS INTERCEPTOR

FUNCTION: Provides a means of collecting food solids before entering the drain line going to a grease interceptor.

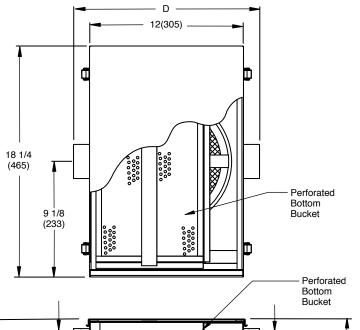

NOTE: Allow 8(205) of clearance above interceptor for bucket removal.

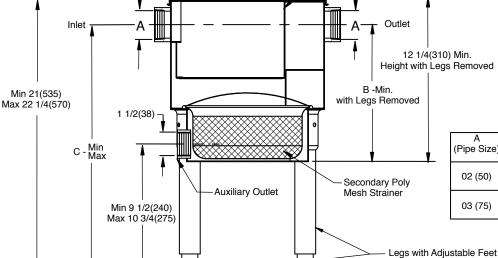

 A (Pipe Size)
 B
 Min Max Max
 D

 02 (50)
 10 3/4 (275)
 18 3/4 (475) 20 1/8 (513)
 14 1/2 (370)

 03 (75)
 10 1/8 (258)
 18 1/8 (460) 19 1/2 (495)
 15 1/4 (390)

A (PIPE SIZE) = 02(50) or 03(75) FIG. 8980T.....THREADED CONNECTIONS **NOTE:** Dimensions shown in parentheses are in millimeters.

REGULARLY FURNISHED:

Fabricated Type 304 Stainless Steel Body with Adjustable Legs, Perforated Bottom Bucket, Secondary Poly Mesh Strainer and Secured Cover.

VARIATIONS:

"Y" No-Hub Connections

(Legs can be cut shorter if required)

See reverse side for illustration of interceptor components.

DATE DESCRIPTION BY CKD. BY WEIGHT POUNDS CUBIC FEET FIGURE NUMBER 8980

SMITH®

s8980BS

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

4-11-06

APPROVED BY

CHECKED BY 占

DRAWN BY: **RN**

FIGURE NUMBER

CEL

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

DRAWING NUMBER

LOCATION

INLINE SOLIDS INTERCEPTOR

