OR VOID DATA

SUPERSEDED

Р

4

NONE

5-17-85

APPROVED BY P

WITHOUT

AND CHANGE

DIMENSIONS ARE SUBJECT TO MANUFACTURERS

2

DRAWN

IGURE JUMBER




LOCATION

FLOOR DRAINS

BLOOD AND WATER DRAINS

FUNCTION: Used in packing house slaughtering areas. Consists of two individual drains. Slotted grate drain permits drainage of animal blood to separate storage tank while adjacent drain connected to sewer is covered by solid ground joint plug. When area is to be washed down, the solid plug is put on the blood drain and the slotted grate on the sewer water drain, thus water used in the cleaning operation will be directed to sewer and will not enter the blood storage tank.

Free Area

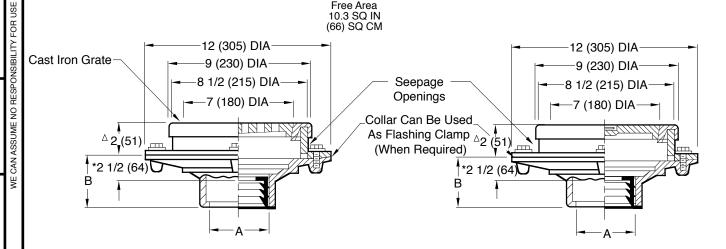

A SIZE	02(50)	03(80)	04(100)
	3 3/4 (95 NO-HUE and Spe 2 (51) fo	5) for Ca	ulk,

*This dimension to Internal Stop of Speedi-Set Gasket.

Fig. 2640C . . . CAULK OUTLET Fig. 2640Y . . . NO-HUB OUTLET




Fig. 2640

TYPICAL INSTALLATION

Drains are located close to each other for ease of switching grate and plug.

REGULARLY FURNISHED:

Two (2) Duco Cast Iron Bodies with Flashing Collar and Bronze Rim, Cast Iron Grate and Ground Joint Plug.

VARIATIONS:

L Speedi-Set Service Weight LXH Speedi-Set Extra Heavy T Threaded Outlet Quad Close Trap Seal (Specify Fig. 2692)

OPTIONAL MATERIALS:

Bronze Grate and Plug -RB Galvanized Cast Iron -G

NOTE: Dimensions shown in parentheses are in millimeters.

FEDC	7-14-15 9-16-96 6-16-95 7-4-94	Revised Variations Remove Heavy Duty Tractor Added Millimeters Revised	TBW EMB EMB CMB	CL BS BS BS	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 2640
REV.	DATE	DESCRIPTION	BY	CKD. BY			_0.0