# Gooseneck AC Sensor Faucet w/ Above Counter Mixer

#### **FEATURES:**

- Brass construction with polished chrome finish
- Sensor eye at base of faucet
- Plug-in AC powered (plug included)
- Gooseneck spout
- Integral above counter mixer
- 60 second flow time out feature
- 9/16"-24 UNF supply connection
- Vandal-resistant 0.5 GPM (1.89 L/min) flow control

## ADD-ONS:

- A-SF-GBLFE: alternate flow aerator group (1.5 GPM, 1.5 GPM laminar and 1.2 GPM)
- A-EA12: 13/16-27 1.2 GPM Aerator
- A-ELF: 13/16-27 1.2 GPM Laminar Flow Aerator
- A-HTS Sensorflo HTS Flex Hose Kit
- SF-4DECK: 4 in. deck plate
- SF-8DECK: 8 in. deck plate

#### **STANDARDS:**

- ASME A112.18.1/CSA B125.1 certified
- NSF/ANSI 61 certified
- NSF/ANSI 372 certified
- ADA compliant

### **WARRANTY:**

Visit www.speakman.com for full product warranty information

- Limited Lifetime Warranty (residential)
- 5 Year Limited Warranty (commercial)






Information continues on next page

All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice

# Gooseneck AC Sensor Faucet w/ Above Counter Mixer

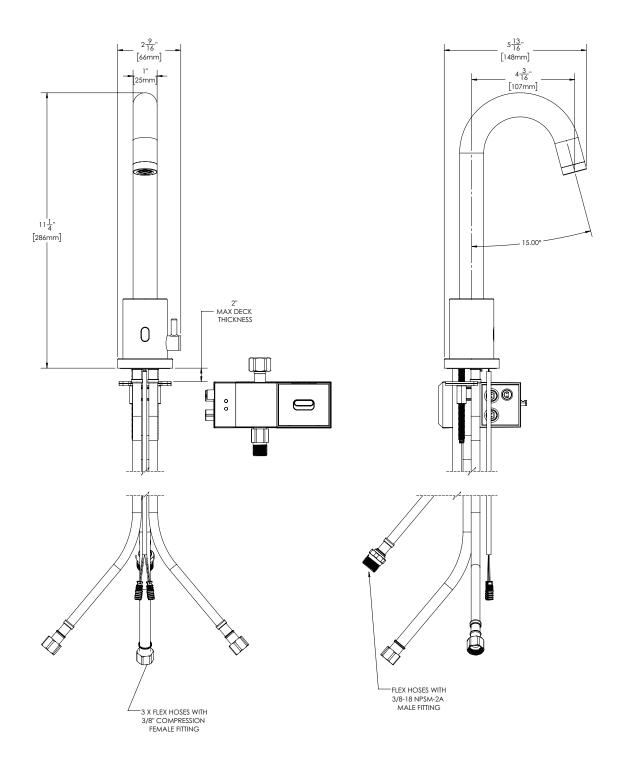

All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice.