

FLOOR DRAINS

MEDIUM DUTY DRAINS WITH 8 1/2" ROUND ADJUSTABLE TOPS

Load Rating: Medium Duty having a Safe Live (Static) Load between 2,000 lbs. (900 kg) and 4,999 lbs. (2,250 kg) per ASME A112.6.3 Floor Drain Standard. For the specific Safe Live Load rating of any grate, contact the Smith representative or factory direct.

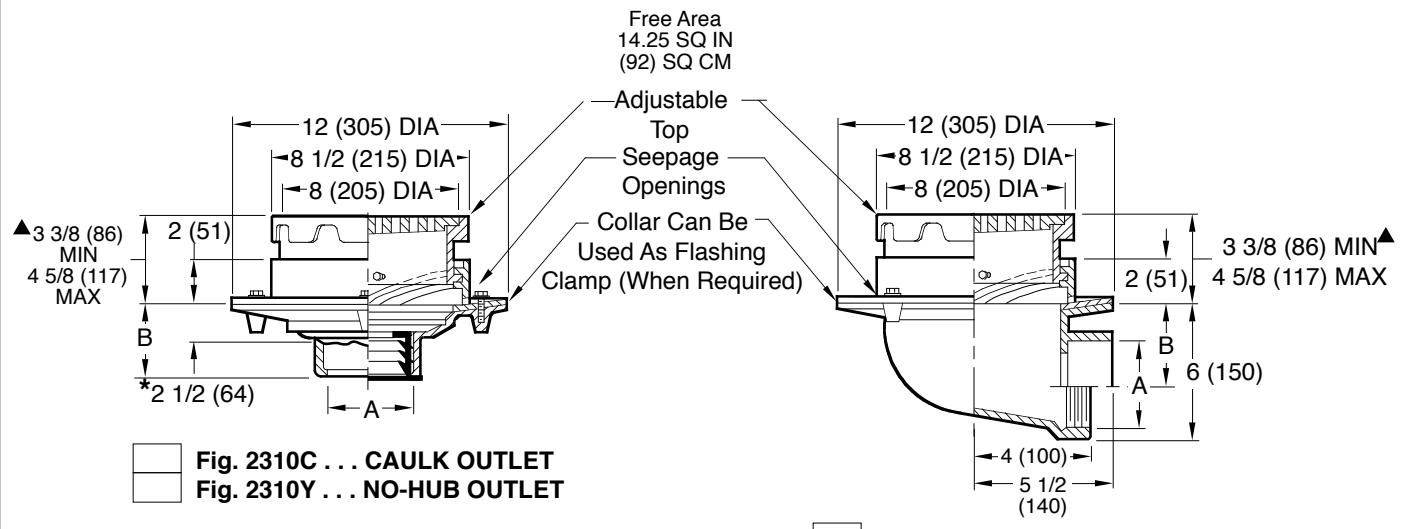


Fig. 2310C ... CAULK OUTLET
 Fig. 2310Y ... NO-HUB OUTLET

Fig. 2315C ... CAULK OUTLET
 Fig. 2315T ... THREADED OUTLET

A SIZE	02 (50)	03 (80)	04 (100)	06 (150)
B	3 3/4 (95) for Caulk, NO-HUB, and Speedi-Set, 2 (51) for Threaded		3 3/4 (95) NO-HUB Only	

A SIZE	02 (50)	03 (80)	04 (100)
B	4 1/4 (110)	3 3/4 (95)	3 1/4 (83)

* This Dimension to Internal Stop of Speedi-Set Gasket.
 ▲ add 3/16" (5) when bronze top is specified

REGULARLY FURNISHED:

Duco Cast Iron Body and Flashing Collar with Adjustable Top and Bar Grate.

VARIATIONS:

- Closure Plug -XP (Fig. 2310 only)
- Dome Grate -D
- Extensions (Specify Height) -E
- Flat Bottom Strainer -FBS (Fig. 2310 only)
- Hinged Grate -H
- L Speedi-Set Service Weight (Fig. 2310 only)
- LXH Speedi-Set Extra Heavy (Fig. 2310 only)
- NO-HUB Adaptor (Specify Fig. 2646Y) (Fig. 2315 only)
- Square Top -S
- * Trap Primer Connection -P050 1/2"(13) & -P075 3/4"(19)
- Vandal Proof Grate -U
- T Threaded Outlet
- Quad Close Trap Seal (Specify Fig. 2692) (Fig. 2310 Only)

OPTIONAL MATERIALS:

- Ductile Iron Grate -M
- Galvanized Cast Iron -G
- Nickel Bronze Top -NB
- Polished Bronze Top -PB
- Stainless Steel (Specify Fig. 9725)

* Not available on Fig. 2310T threaded outlet drain

NOTE: Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER **S2310**
 SIZE **A**
 SCALE: **NONE**
 DATE: **5-17-85**
 APPROVED BY: **TD**
 CHECKED BY: **TD**
 DRAWN BY: **PJ**
2310, 2315
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
							2310, 2315