

FLOOR DRAINS

8 1/2" (215) ROUND TOP - HEAVY DUTY DRAINS WITH TRACTOR GRATE

Load Rating: Heavy Duty having a Safe Live (Static) Load between 5,000 lbs. (2,250 kg) and 7,499 lbs (3,375 kg) per ASME A112.6.3 Floor Drain Standard. For the specific Safe Live Load rating of any grate, contact the Smith representative or factory direct.

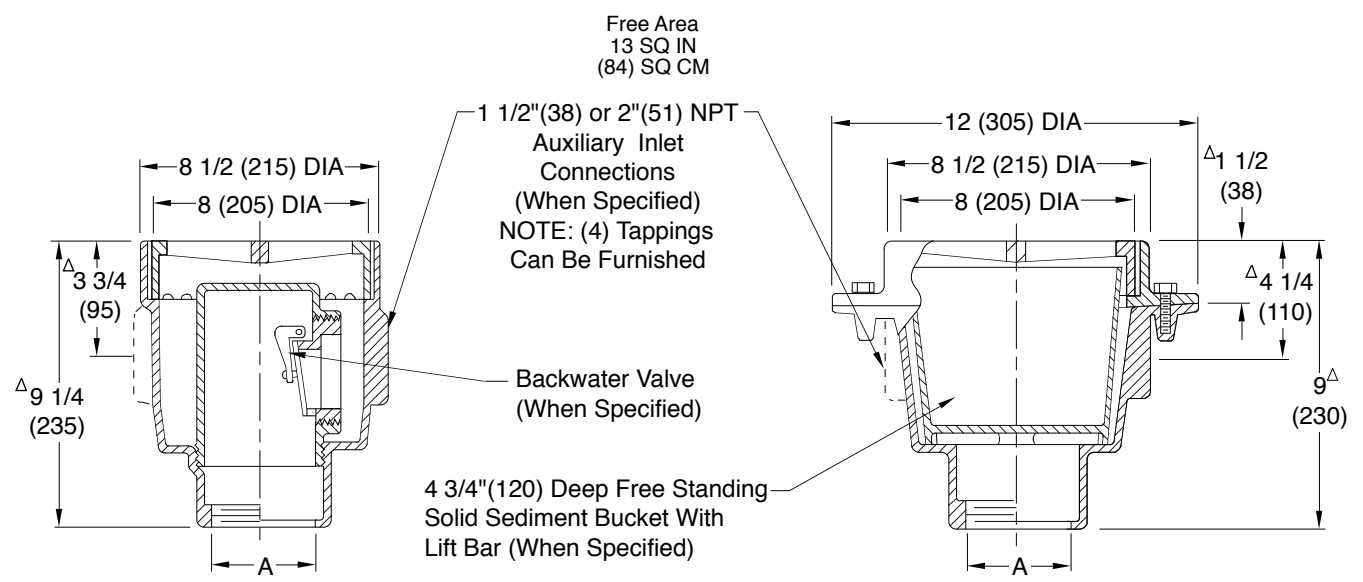


Fig. 2490C . . . LESS FLANGE
 Fig. 2490T . . . LESS FLANGE

Fig. 2495C . . . WITH FLANGE
 Fig. 2495T . . . WITH FLANGE

Δ add 3/16"(5) when bronze top is specified.

REGULARLY FURNISHED:
 Duco Cast Iron Body and Tractor Grate with or Less Flange and Collar as indicated by Figure Number Selected.

- VARIATIONS:**
- Auxiliary Inlets -N
 - 1 1/2(38) or 2"(51) Hub Adaptor on Auxiliary Inlets (Specify Fig. 2645)
 - Backwater Valve Assembly -V
 - Extension (Specify Height) -E
 - Flat Bottom Strainer -FBS
 - Hinged Bar Grate -H (Light Duty)
 - NO-HUB Adaptor (Specify Fig. 2646Y)
 - Standing Slotted Bucket -B
 - Standing Solid Bucket -SB
 - Square Top -S
 - Closure Plug -XP
 - Vandal Proof Grate -U
 - Quad Close Trap Seal (Specify Fig. 2692)

- OPTIONAL MATERIALS:**
- Ductile Iron Grate -M
 - Galvanized Cast Iron -G
 - Nickel Bronze Top -NB
 - Polished Bronze Top -PB

NOTE: Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER: S2490
 SIZE: A
 SCALE: NONE
 DATE: 5-17-85
 APPROVED BY: TD
 CHECKED BY: TD
 DRAWN BY: PJ
2490, 2495
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

H G F E	7-23-19 6-18-19 7-2-15 10-1-01	Added Load Rating Removed Function Revised Variations Remove (Fig. 2490 only) under Var.	MW MW TBW RN	JM JM CL CL	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 2490, 2495
REV.	DATE	DESCRIPTION	BY	CKD. BY			