

M

SMITH® JAY R. SMITH MFG. CO.®
 MEMBER OF MORRIS GROUP INTERNATIONAL
 POST OFFICE BOX 3237
 MONTGOMERY, ALABAMA 36109-0237 (USA)
 TEL: 334-277-8520 FAX: 334-272-7396 www.jrsmith.com




LOCATION

PARKING DECK FLOOR DRAINS WITH HEAVY DUTY WIDE FLANGE COLLAR FOR PRECAST SLABS

Load Rating: Heavy Duty having a Safe Live (Static) Load between 5,000 lbs. (2,250 kg) and 7,499 lbs (3,375 kg) per ASME A112.6.3 Floor Drain Standard. For the specific Safe Live Load rating of any grate, contact the Smith representative or factory direct.

Free Area
 14.25 SQ IN
 (92) SQ CM

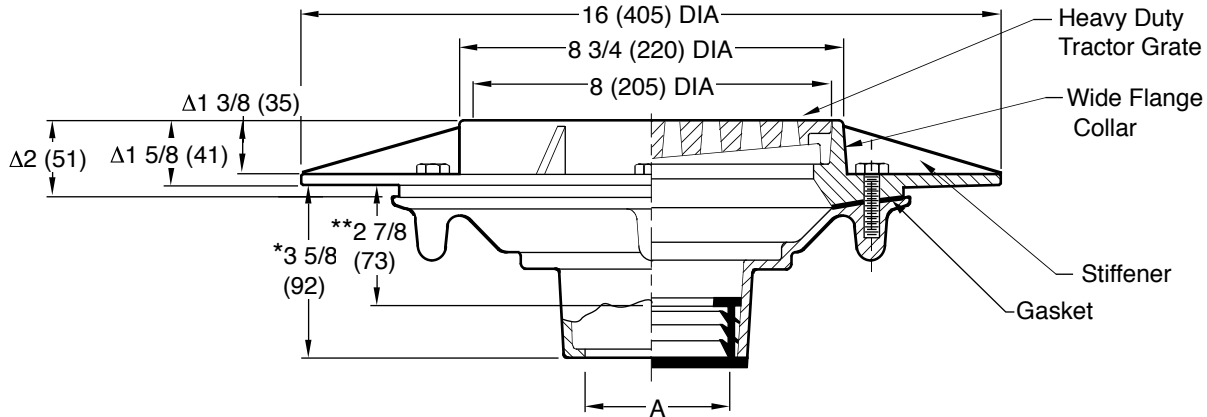

A (Pipe Size) = 02(50), 03(75), or 04(100)

- Fig. 2614C CAULK OUTLET
- Fig. 2614Y NO-HUB OUTLET

recommended deck opening 13" (330) DIA

*Same for Caulk and No-Hub, 2 (51) for Threaded.
 **This dimension to internal stop of Speedi-Set gasket.
 Δadd 1/4 (6) when bronze top is specified.

REGULARLY FURNISHED:
 Duco Cast Iron Body, Heavy Duty Wide Flange Collar with Heavy Duty Tractor Grate. Gasket Seal Between Body and Collar.

VARIATIONS:

- Dome Bottom Strainer -DBS
- Cast Iron Flat Bottom Strainer -FBSCI
- Side Outlet (Specify Fig. 2619)
- Square Top -S
- Vandal Proof -U
- L Speedi-Set Service Weight
- LXH Speedi-Set Extra Heavy
- T Threaded Outlet
- Underdeck Clamp -C
- Quad Close Trap Seal (Specify Fig. 2692)

OPTIONAL MATERIALS:

- Ductile Iron Grate -M
- Galvanized Cast Iron -G
- Nickel Bronze Top -NB
- Polished Bronze Top -PB

NOTE: Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER S2614
 SIZE A
 NONE
 SCALE:
 DATE: 5-6-93
 APPROVED BY: BS
 CHECKED BY: CR
 DRAWN BY: TBW
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

2614

FIGURE NUMBER	M L K J	7-23-19 6-18-19 1-30-18 1-18-18	Added Load Rating Removed Function Rev. Reg. Furn., Title, Added Gasket Rev. Reg. Furn., Title, Callout	MW MW TBW TBW	JM JM CL CL	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 2614
REV.	DATE	DESCRIPTION	BY	CKD. BY				