


TILE FLOOR CLEANOUTS WITH "TWIS-TO-FLOOR®" ADJUSTABLE TOPS

ROUND NICKEL BRONZE TOP WITH TILE RECESS

FUNCTION: For use in floors and areas which are covered with a floor covering such as asphalt or vinyl tile, linoleum, etc., bearing foot and medium load wheeled traffic. Tile recess receives inlay of floor material, presenting an unobtrusive appearance. Allows for easy floor level adjustment.

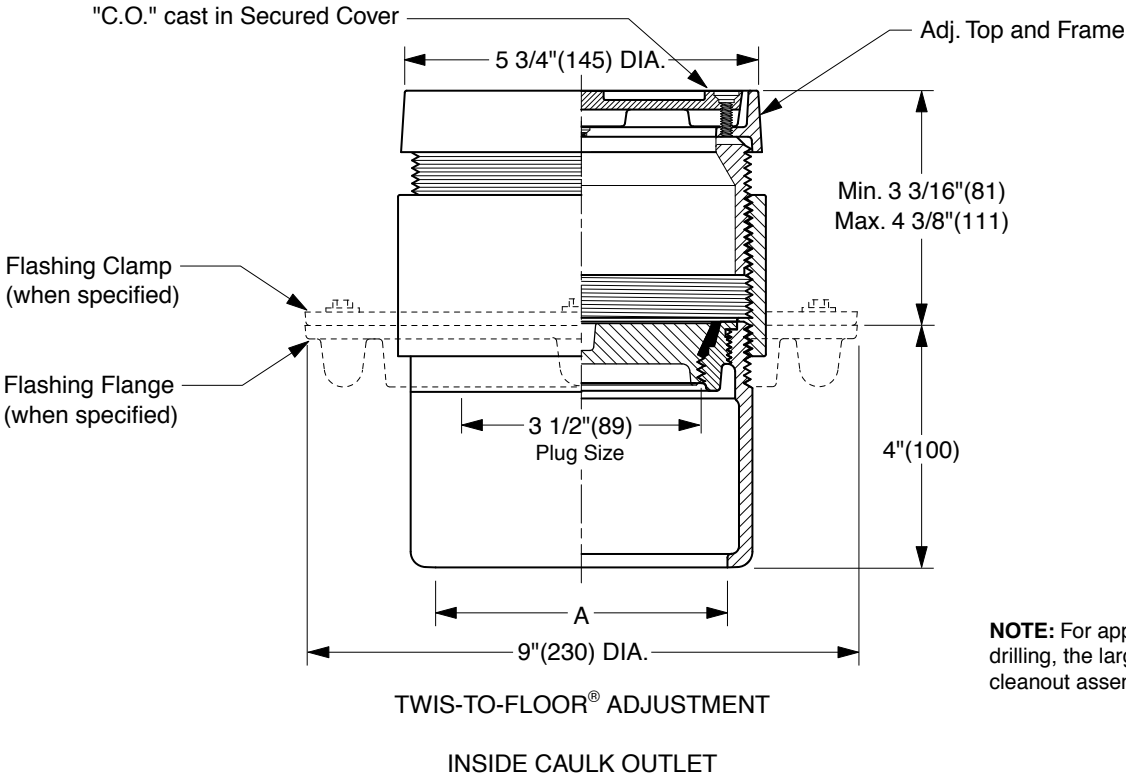

NOTE: For applications using core drilling, the largest diameter of the cleanout assembly is 6 5/16" (160).

TWIS-TO-FLOOR® ADJUSTMENT
INSIDE CAULK OUTLET
 "A" (Pipe Size) = 02(50), 03(75) or 04(100)

- Fig. 4145C.....Gasket Seal - ABS Plug
- Fig. 4146C.....Gasket Seal - Bronze Plug
- Fig. 4148C.....Taper Thread - Bronze Plug
- Fig. 4149C.....Taper Thread - ABS Plug

(Twis-to-Floor® design shown with gasketed plug.)

NOTE: Dimensions shown in parentheses are in millimeters.

REGULARLY FURNISHED:

Duco Cast Iron Cleanout with Round Adjustable Secured Nickel Bronze Top with 1/8"(3) Tile Recess. Closure Plug Type as Indicated By Figure Number Selected.

VARIATIONS:

- Flashing Flange -F
- Flange with Flashing Clamp -F-C
- Vandal Proof Top -U

OPTIONAL MATERIALS:

- Galvanized Cast Iron -G
- Polished Bronze Top -PB

DRAWING NUMBER S4145
 SIZE A
 SCALE: NONE
 DATE: 2-16-70
 APPROVED BY: JM
 CHECKED BY: BH
 DRAWN BY: RK
4145 SERIES
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

| | | | | | | | |
|-------------|----------------------------------|---|----------------|----------------|------------------|----------------------|-------------------------------------|
| J H G | 12/17/04 07/29/02 10/17/00 | Added Core-Drilling Note Corrected Clamp & Flange view New design | JJ JJ JJ | CL CL BS | WEIGHT POUNDS | VOLUME CUBIC FEET | FIGURE NUMBER 4145 SERIES |
| REV. | DATE | DESCRIPTION | BY | CKD. BY | | | |