SDX2565

⋖

APPROVED BY:

CHECKED BY

DRAWN BY:

2


DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

OR VOID DATA

FLOOR DRAINS

WIDE FLANGE BODIES WITH "SAFE-SET" BUCKET

FUNCTION: Used in areas where waste water contains solids or debris that must be prevented from entering drainage system. Wide flange allows adhesion of waterproof traffic deck covering, insuring watertight integrity. "Safe-Set" designs insures bucket replacement after cleaning. DX2565 is used for general light duty areas and the DX2566 is provided with large top to accommodate anticipated high flows.

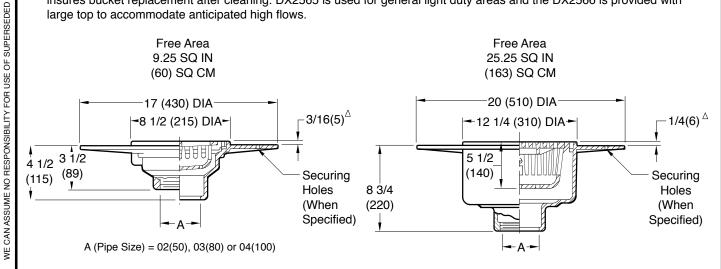

A (Pipe Size) = 02(50), 03(80), 04(100), 05(125) or 06(150)

Fig. DX2565C CAULK OUTLET
Fig. DX2565T THREADED OUTLET

Fig. DX2566C . . . CAULK OUTLET
Fig. DX2566T . . . THREADED OUTLET

Δadd 3/16"(5) when bronze top is specified.

REGULARLY FURNISHED:Duco Cast Iron 4"(100) Wide Flange Body with Bucket and Grate.

	VARIATIONS:				
	Membrane Clamp (Specify				
	Fig. DX2565R or DX 2566R)				
NO-HUB Adaptor (Specify					
	Fig. 2646Y)				
	Securing Holes -SH				
	Vandal Proof Grate -U				
	Underdeck Clamp -UDC				
	Quad Close Trap Seal				
	(Specify Fig. 2692)				

OPTIONAL MATERIALS: Galvanized Cast Iron -G Nickel Bronze Top -NB Polished Bronze Top -PB

NOTE: Dimensions shown in parentheses are in millimeters.

G F E D	7-17-15 1-31-13 04/22/04 4-9-97	Revised Variations Rev. Var. and Drawing Added UDC to Variations Added Millimeters	TBW TBW JJ EMB	CL CL CL BS	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER DX2565. DX2566
REV.	DATE	DESCRIPTION	BY	CKD. BY			DX2565, DX2566