


## R1200-SO

## LARGE SUMP DUAL OUTLET ROOF DRAIN

**Specification:** MIFAB® Series R1200-SO lacquered fabricated deep sump roof drain with No Hub side and bottom outlet, 15" diameter anchor flange, large cast iron waterproofing membrane clamp ring with integral gravel stop, and standard selflocking low profile aluminum dome strainer.

**Function:** Used in any type of flat roofs. Large free area dome provides for efficient drainage of rainwater and prevents debris from entering the drain line. Extra wide anchor flange and membrane clamp with tongue in groove design provides for secure grip of membrane and roof flashing materials.

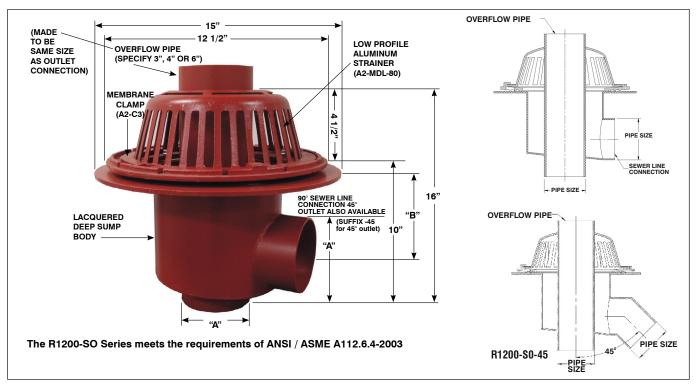

PART NUMBER	BODY HEIGHT			
	"A" PIPE SIZE (NO HUB CONNECTION)	OVERFLOW PIPE SIZE	"B" DIMENSION SIDE OUTLET DEPTH	
R1203-SO	3" (76)	3" (76)	5 9/16" (141)	
R1204-SO	4" (102)	4" (102)	5 9/16" (141)	
R1206-SO	6" (152)	6" (152)	5" (127)	

SUFFIX	OPTIONAL VARIATIONS	SUFFIX	OPTIONAL VARIATIONS
-6	Vandal proof dome	-DU6	Fabricated, powder epoxy coated steel dome on
-11	Acid resistant epoxy coating		overflow pipe 6"
-12	Galvanized metal dome	-G	Stainless steel ballast guard
-12A	Galvanized body and membrane clamp	-M	Metal dome
-12B	Galvanized metal dome and membrane clamp	-MS	Stainless steel mesh screen on overflow pipe
-13	Galvanized body, membrane clamp and dome	-OP	2" high overflow pipe
-45	45 Degree sewer line connection outlet	-SS	Secondary Strainer (Overflow)
-81	Rough bronze dome	-U	Underdeck clamp
-83	Stainless steel mesh screen over metal dome	-V	Fixed Static Extension 2", 3", 4"
-B	Sump receiver	-VG	Galvanized fixed extension (2",3",4")
-BA	Buy America Act compliant product	-W-1	Water proofing flange
-DU	Fabricated, powder epoxy coated steel dome on		
	overflow pipe 3", 4"		

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name:	Page No:
Section No:	Contractor:
Schedule No:	Purchase Order No: