


# FLOOR DRAINS

## WITH 8 1/2" (215) ROUND TOPS

### MEDIUM DUTY DRAINS

Load Rating: Medium Duty having a Safe Live (Static) Load between 2,000 lbs. (900 kg) and 4,999 lbs. (2,250 kg) per ASME A112.6.3 Floor Drain Standard. For the specific Safe Live Load rating of any grate, contact the Smith representative or factory direct.

Free Area  
 14.25 SQ IN  
 (92) SQ CM

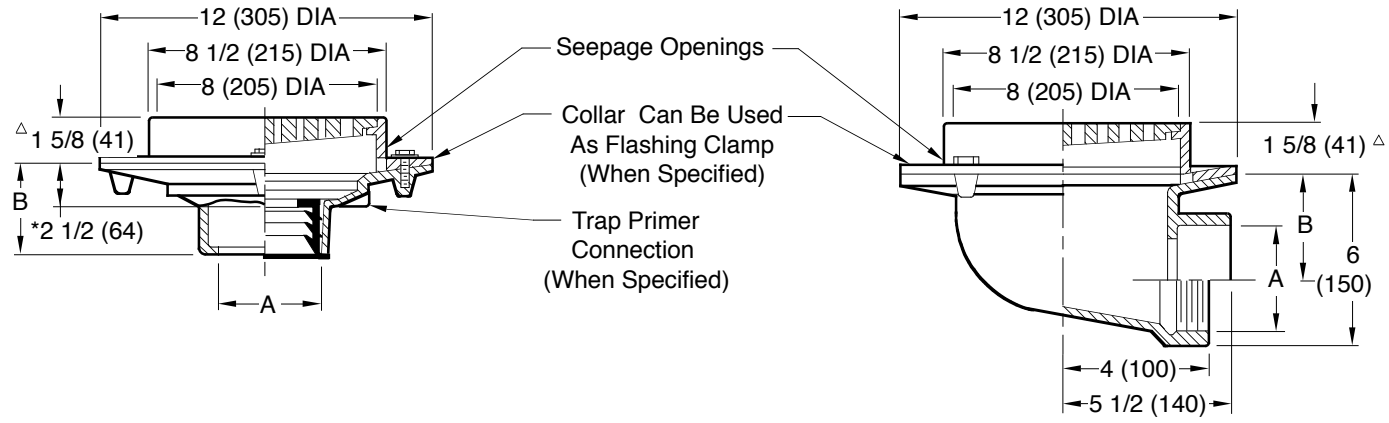

\*\*  Fig. 2110C ... CAULK OUTLET  
 Fig. 2110Y ... NO-HUB OUTLET

Fig. 2115C ... CAULK OUTLET  
 Fig. 2115T ... THREADED OUTLET

A SIZE	02 (50)	03 (75)	04 (100)	06 (150)
B	3 3/4 (95) for Caulk, NO-HUB, and Speedi-Set, 2 (51) for Threaded		3 3/4 (95) NO-HUB Only	

A SIZE	02 (50)	03 (75)	04 (100)
B	4 1/4 (110)	3 3/4 (95)	3 1/4 (83)

#### REGULARLY FURNISHED:

Duco Cast Iron Body and Flashing Collar with Cast Iron Bar Grate.

#### VARIATIONS:

- Closure Plug -XP (Fig. 2110 only)
- Dome Grate -D
- Flat Bottom Strainer -FBS (Fig. 2110 only)
- L Speedi-Set Service Weight (Fig. 2110 only)
- LXH Speedi-Set Extra Heavy (Fig. 2110 only)
- NO-HUB Adaptor (Specify Fig. 2646Y) (Fig. 2115 only)
- Sediment Bucket -B
- Square Top -S
- Trap Primer Connection -P050 1/2"(13) & -P075 3/4"(19)
- Vandal Proof Grate -U
- Wide Flange Deck Drain (Specify Fig. DX2565)
- T Threaded Outlet
- Quad Close Trap Seal (Specify Fig. 2692) (Fig. 2110 Only)

#### OPTIONAL MATERIALS:

- Ductile Iron Grate -M
- Galvanized Cast Iron -G
- Nickel Bronze Top -NB
- Polished Bronze Top -PB
- Stainless Steel (Specify Fig. 9710)

△ Add 3/16" (5) when bronze top is specified.

\*This dimension to internal stop of Speedi-Set gasket.  
 \*\*Meets U.S. Gov't Spec. per WW-P-541-b, Type 220, 02 (50) and 03" (75) sizes only. See Fig. 2130 for 04" (100) size.

Meets ANSI Spec A112.6.3-2001  
 02(50), 03(75) or 04"(100) sizes only.

▲ Not available on Fig. 2110T threaded outlet drain.

**NOTE:** Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER S2110  
 SIZE A  
 SCALE: NONE  
 DATE: 5-17-85  
 APPROVED BY: TD  
 CHECKED BY: TD  
 DRAWN BY: PJ  
 2110, 2115  
 FIGURE NUMBER

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA  
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
							<b>2110, 2115</b>