


## F1480

## FLOOR DRAIN WITH 12" SQUARE HEAVY DUTY TRACTOR GRATE AND DEEP SUMP

**Specification:** MIFAB® Series F1480 epoxy coated large capacity floor drain with deep sump body, and standard 1" (25) thick, 12" (305) hinged square, (specify material finish) tractor grate with free area of 51 square inches (32,903²).

**Function:** Used in industrial factories, mechanical rooms, parking garages and other non-membrane finished areas. 12" square tractor grate is used with all types of poured finished floors. Hinged grate permits easy access to sediment bucket.

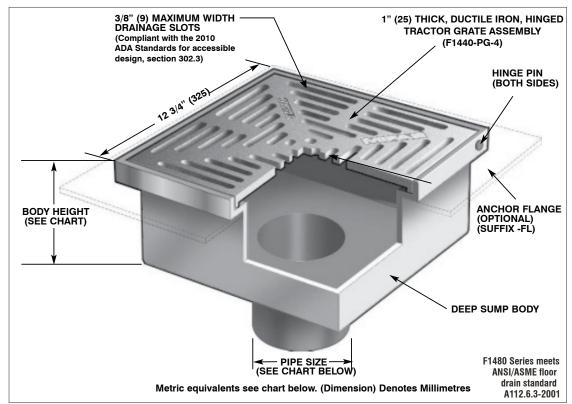

STRAINER	ANSI/ASME RATING		PIPE	BODY HEIGHT			
DIAMETER	FREE Area	LOAD RATING N.B. (-1) / S.S. (-3) / D.I. (-4)	SIZE	NO HUB (Standard)	PUSH ON (P)	THREADED (T)	INSIDE Caulk (X)
12" x 12" (305 x 305)	51 in <sup>2</sup> (32,903 <sup>2</sup> )	ANSI/ASME LOAD CLASS "SPECIAL DUTY" (OVER 10,000 LBS.)	2" (51) 3" (76) 4" (102) 6" (152)	11" (280) 11" (280) 11" (280) 11" (280)	11 3/4" (289) 11 3/4" (289) 11 3/4" (289) 11 3/4" (289)	10" (254) 10" (254) 10" (254) 10" (254)	11" (280) 11" (280) 11" (280) 11" (280)

SUFFIX	OPTIONAL VARIATIONS	SUFFIX	OPTIONAL VARIATIONS
-1	Nickel bronze strainer (veneer)	-90	Threaded side outlet (2", 3", 4")
-3	Stainless steel strainer (veneer)	-90NH	No hub side outlet (2", 3", 4")
-4	Ductile iron strainer	-BA	Buy American Act compliant product
-5	Sediment bucket	-C	Membrane clamp
-6	Security screws (T-20 Torx & pin)	-FL	Anchor flange
-7	1/2" trap seal primer connection	-HP	Heel proof grate (1/4" maximum grate opening size, -3 only
-8	Backwater valve (2", 3", 4")	(Standard)	No hub outlet
-11	Acid resistant epoxy coated body	-MG	MI-GARD Floor Drain Trap Sealer (2", 3" or 4")
-13	Galvanized body	Р	Push on outlet
-20	Secondary dome strainer	-PA	Pennsylvania Steel Act compliant product
-21	Secondary flat stainless steel strainer (2", 3", 4")	Т	Threaded outlet (2",3",4")
-22	Less grate	X	Inside caulk outlet
-28	Stainless steel body and grate (Type 304)		

Job Name:	Page No:
Section No:	Contractor:
Schedule No:	Purchase Order No:

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880